


Step3:Wiegand Output Seeting→Card No.(User ID)

Wiegand output type: Determined by 3rd access controller system.

Output Data Type:Card No or User ID, it means when face recognitioned, the device will output the card NO. or user id to the 3rd system via wiegand. Our device as a card reader which bond the face.

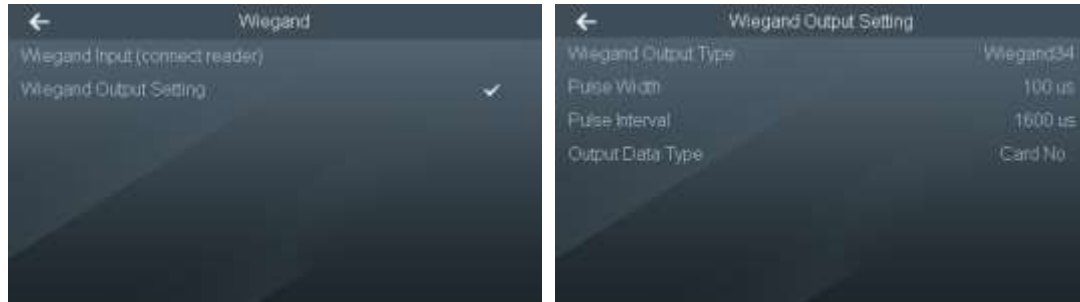

For example:

In 3rd party system :

A user:Name: jimmy ,Card NO. :1234567890 ,

wiegand Format: 34 bit

Device Setting: Wiegand output ,Wiegand34; Output :Card No.

User In device: Register Jimmy's face , register Jimmy card: 123456780

Note: Card No has different rule , in our device, it display directly. But some company display in reverse or another way.

In our next firmware(In June), we will add card display in reverse way.

Wire connect : D0 ,D1 ,Ground.