



**HIKVISION**

# 2018 Q1 EU CCTV CATALOGUE

## Solution Series

[www.hikvision.com](http://www.hikvision.com)

## HIKVISION UNAUTHORIZED DISTRIBUTORS POLICY

Hikvision Europe sells products only through authorized distributors. We value our industry partners and are proud of the relationships we have developed to help expand the use of our innovative technology products and solutions. These authorized distributors have committed to serve as a link in the Hikvision Europe value chain by providing excellent pre- and post-sale customer service, including full firmware and sales engineering support.

Not every distributor advertising Hikvision products has been authorized by Hikvision Europe to advertise or sell those products. We warn potential customers against purchasing these "gray market" products from unauthorized distributors. Unauthorized distributors may be selling counterfeit, used, or damaged product. Much of the products sold by unauthorized distributors have been altered with modified firmware. Since this means that it is no longer in original factory condition, Hikvision warranty is void, per company policy.

We warn potential customers against purchasing from unauthorized distributors. Purchasing through authorized Hikvision Europe distributors ensures that you receive the benefits of technical support, project registration, dealer loyalty programs and advance replacement of any camera, recorder, monitor, video server, or software, in addition to Hikvision Europe full warranty. Additionally, products purchased through authorized distribution partners have additional features and capabilities that distinguish the Europe offering.

If you have any questions or concerns about the official status of your Hikvision distributor before your purchase, please contact Hikvision Europe Customer Service at [support.eu@hikvision.com](mailto:support.eu@hikvision.com) to confirm their authorized status.

Thank you for your continued support of our industry-leading video surveillance products.

## ABOUT HIKVISION

It started with cutting-edge technology: high-definition IP cameras, digital video servers, hybrid and standalone DVRs, NVRs, speed domes, encoders and decoders. And momentum continues to develop new technologies for a safer future.

Strengthened by one of the largest R&D teams in the video surveillance industry, the innovation behind these products quickly made Hikvision the #1 CCTV and video surveillance equipment provider in the world (2017 IHS Report). A total solution provider, Hikvision manufactures a full suite of video surveillance products and solutions for a broad range of vertical markets, including retail, education, and many others. Whatever the scope or requirements of the application, Hikvision has a user-friendly, highly scalable product to meet those needs.





# CONTENTS

## 01 IP CAMERAS 15 - 24

Solution Series 17 - 22

DeepinView Series 23 - 24

## 02 ANPR CAMERAS 25 - 26

## 03 IP PTZ CAMERAS 27 - 31

Professional Series 28

Solution Series 29 - 31

## 04 PANOVA CAMERAS 32 - 35

Solution Series 34

DeepinView Series 35

## 05 THERMAL CAMERAS 36 - 38

## 06 NETWORK VIDEO RECORDERS 39 - 42

## 07 DISPLAYS 43 - 46

LED Monitor 44 - 45

LCD Monitor 46

## 08 SWITCHES 47 - 50

Unmanaged PoE Switch 47 - 48

Web-managed PoE Switch 49

Unmanaged non-PoE switch 50

## 09 DECODERS 51 - 52

6400 series Decoder 51

6900 series Decoder 52

## 10 ENCODERS 53

## 11 KEYBOARD 54 - 55

Network Keyboard 54

RS-485 Keyboard 55

## 12 ACCESSORIES 56 - 66

Transmission accessory 56

Network Cable 57

HDD 58

Intelligent Storage 59


PoE Video Repeater 60

Microphone 61


Bracket 62 - 66

# MODEL NAME CODING RULE

## Network Camera

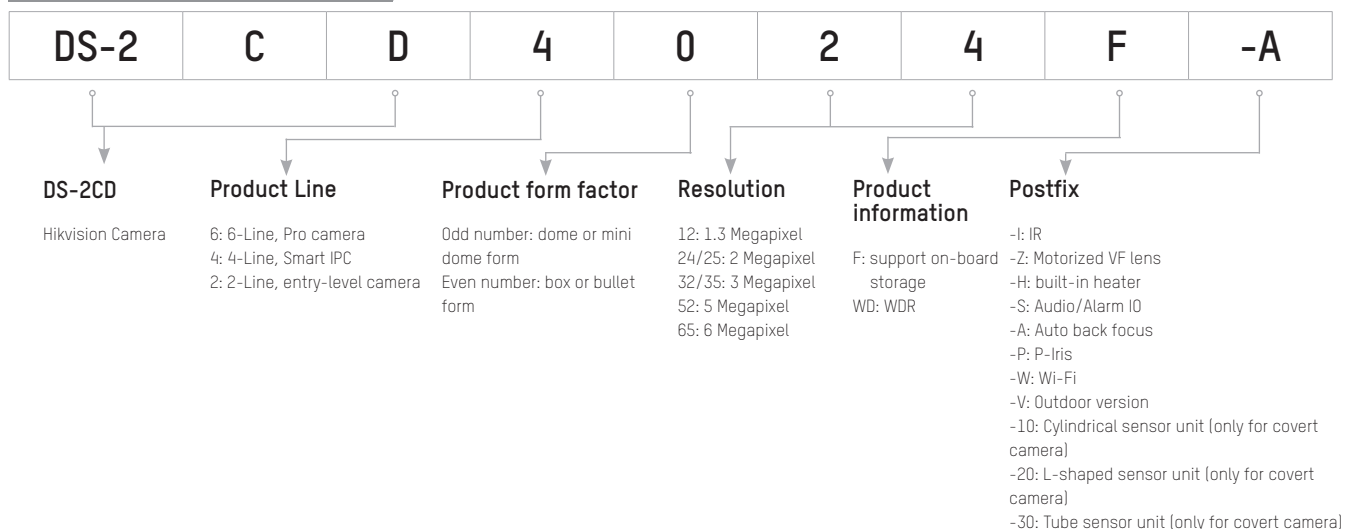


## PTZ Dome Camera

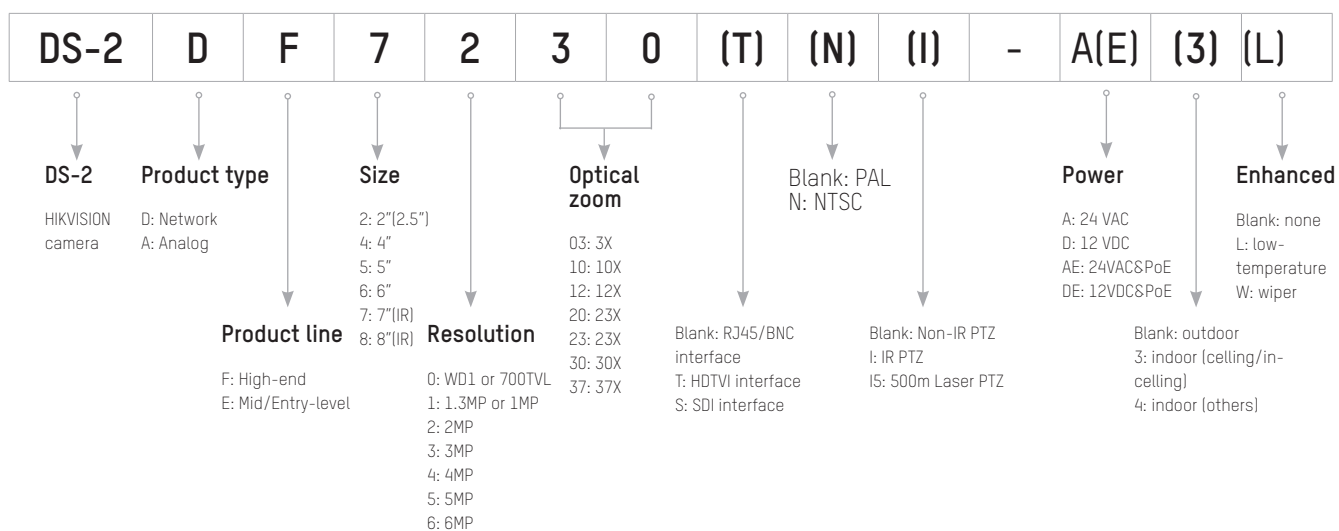


# MODEL NAME CODING RULE

## Analog Camera

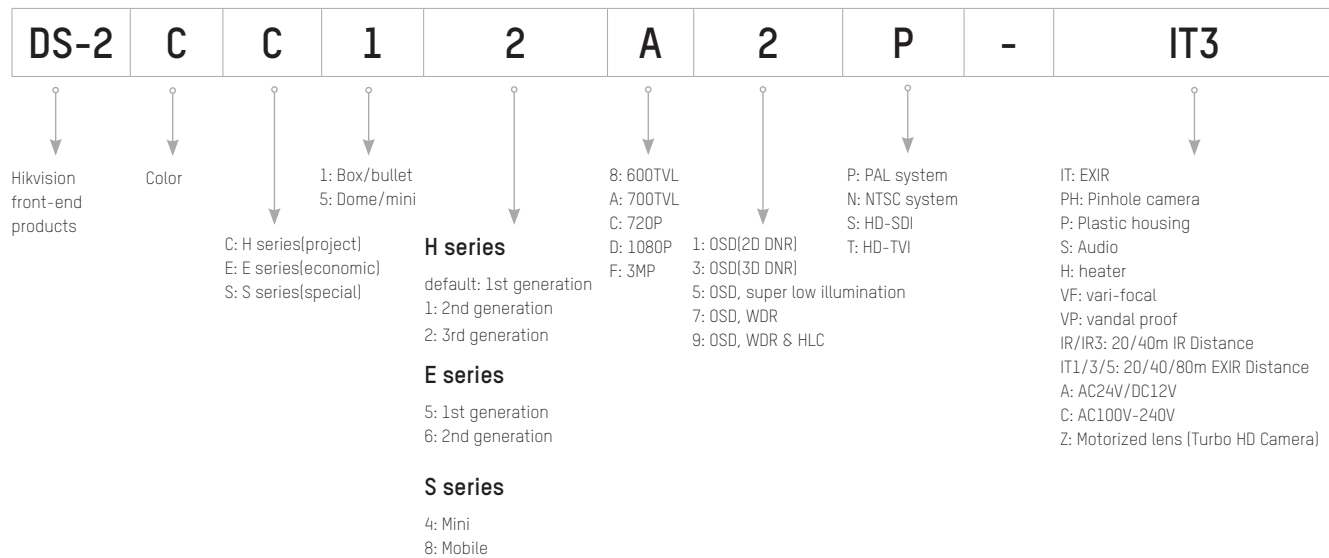


## DVR

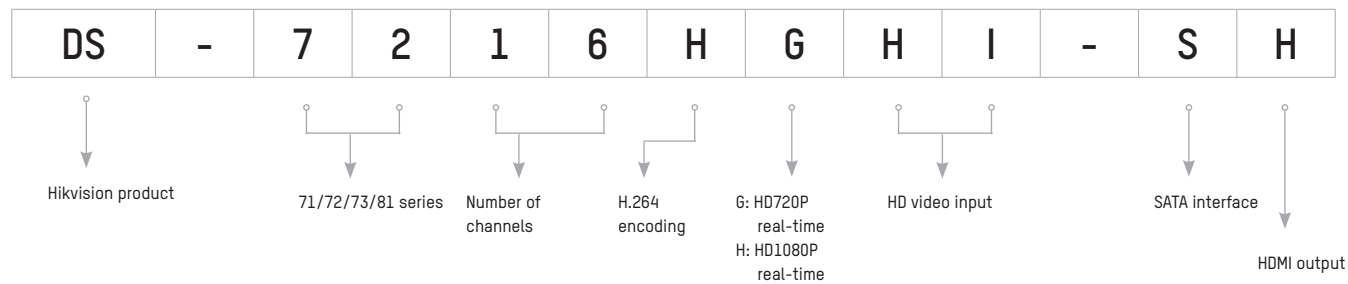


# MODEL NAME CODING RULE

## NVR

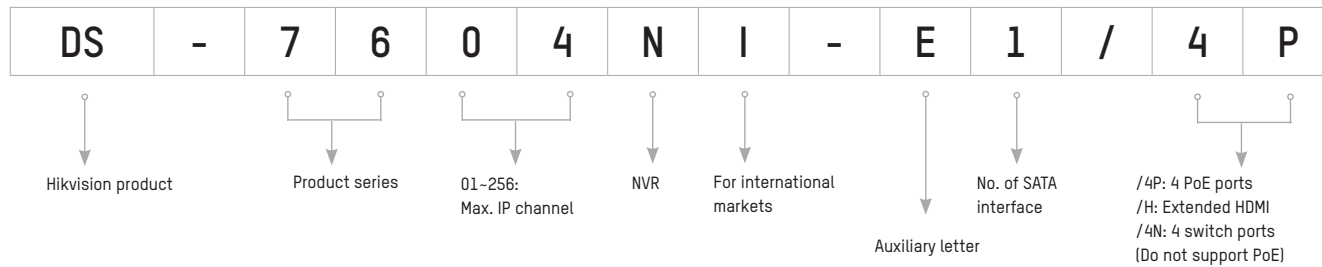

## Video Encoder

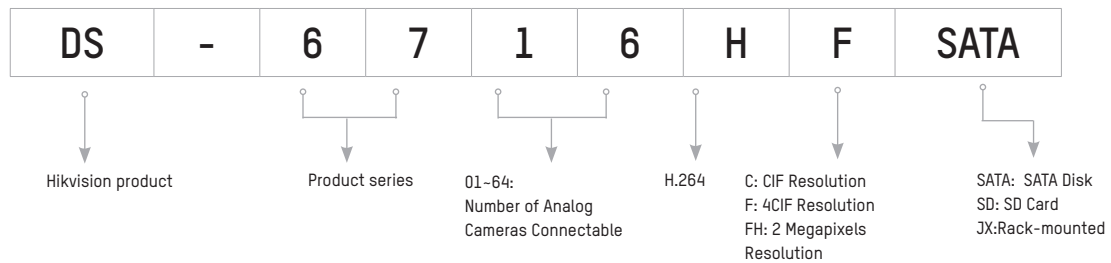





# ECOSYSTEM PARTNERSHIP PROGRAM FOR TECHNOLOGY INTEGRATION PARTNERS BUILD SMART SOLUTIONS WITH HIKVISION

BUSINESS DEVELOPMENT SUPPORT

JOINT EVENT, MARKETING AND COMMUNICATION ACTIVITIES

CONNECTION OPPORTUNITIES AMONG HIKVISION NETWORK

HIKVISION SOLUTION WEBSITE LISTING & RECOMMENDATIONS



BUILDINGS



SAFE CITIES



TRAFFIC




RETAIL



PERIMETER



POLICE  
ENFORCEMENT

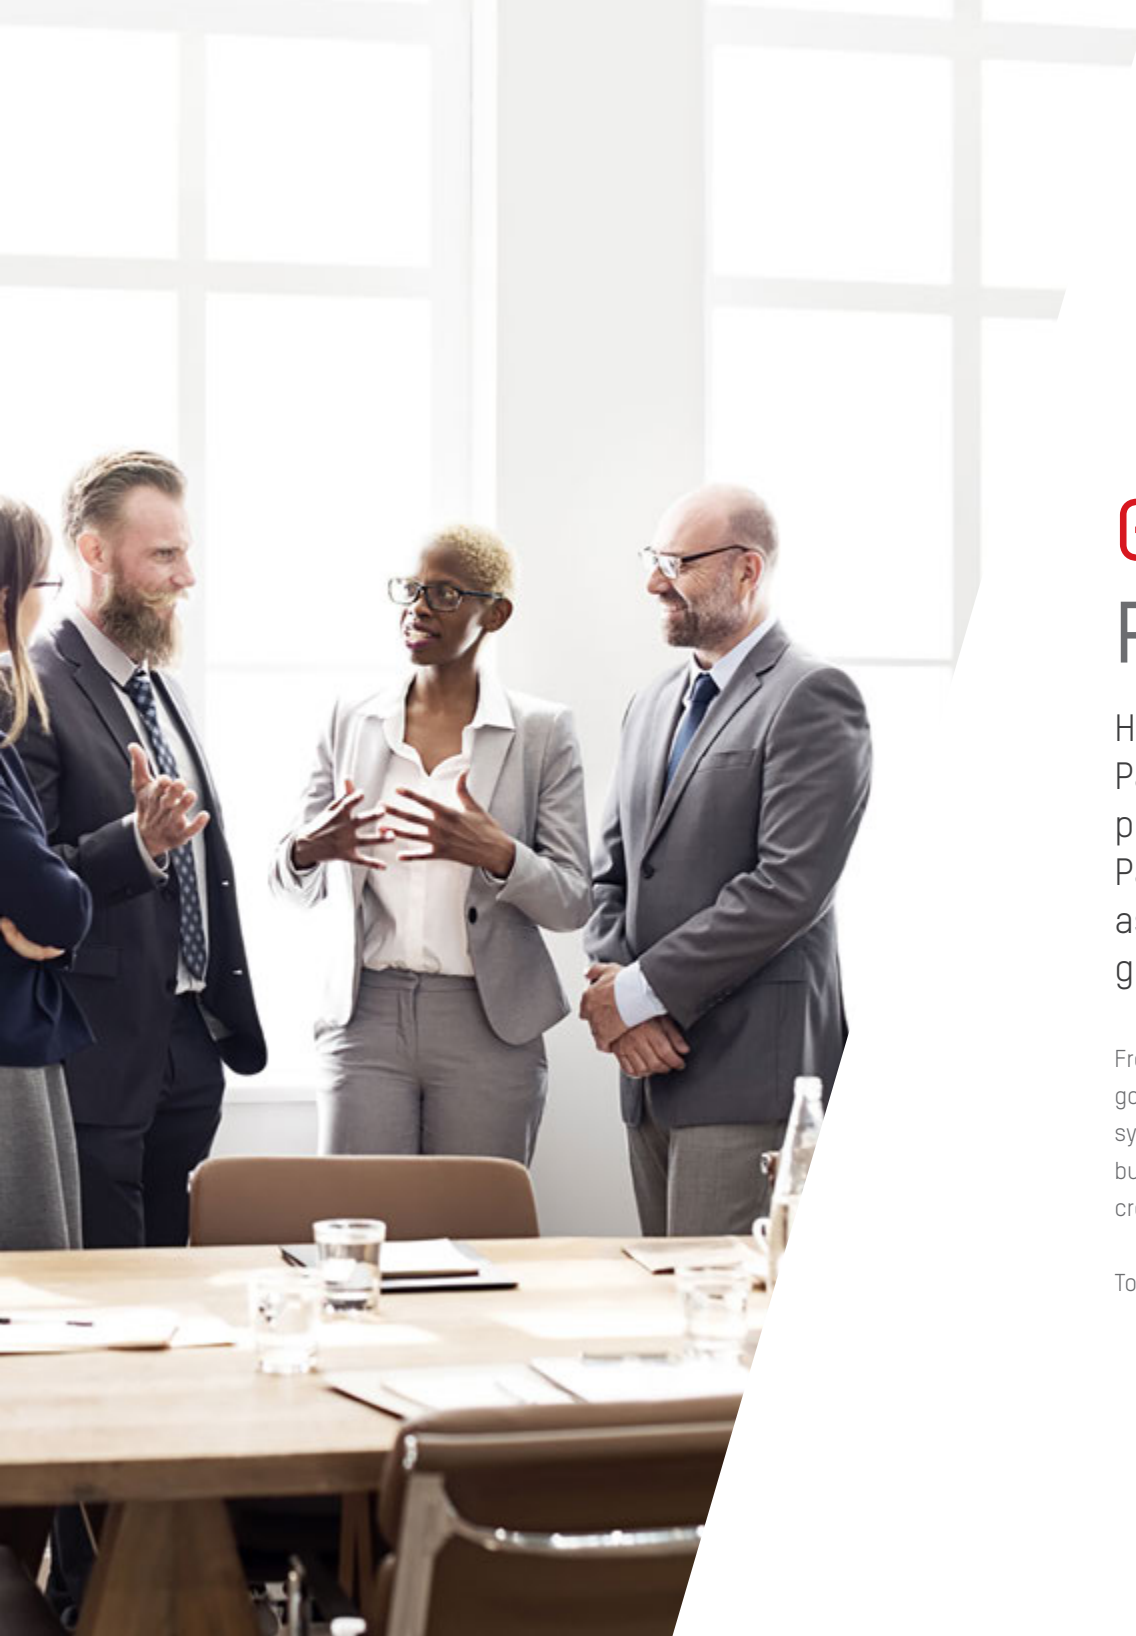

## GREATER PARTNERSHIPS

Hikvision is pleased to introduce an exclusive, invitation-only Partner Program. We are committed to investing in our installer partners with a focus on capitalisation of project opportunities. Partner with Hikvision and leverage our unique market position as the leading video product manufacturer in the world, while gaining the benefits of an invitation-only program.

From inside sales to engineering support, from customer service to technical support, Hikvision goes the extra mile to provide customers with all of the elements they need for a first-class security system. Hikvision's Dealer Partner Program provides additional resources for dealers to help promote business success through knowledge and valuable tools. Hikvision is committed to protecting and creating business value for its customers.

To learn more about the program, please contact us at [partners.eu@hikvision.com](mailto:partners.eu@hikvision.com)

# VERTICAL MARKET FOCUS

For a complete overview of all verticals, please visit [www.hikvision.com](http://www.hikvision.com)

## TRANSPORTATION

Hikvision offers a wide assortment of solutions to meet the needs of transport hubs, roads, highways, and more. Effects of exhaust, sand, winter salt, snow, sleet and high winds are not an issue for Hikvision cameras, which are highly rated and made to resist severe outdoor conditions.

## HEALTHCARE

Patient monitoring, emergency rooms, pharmacies, speciality departments, and restricted areas are all critical zones that require reliable security equipment. Just as we all depend on our physician to keep us well, we can depend on Hikvision's solutions to ensure the security of healthcare facilities.

## EDUCATION

Protection of loved ones is one of Hikvision's highest priorities. Budget-minded school districts find Hikvision's product selection unmatched in the industry. High resolution cameras offer excellent image quality for a market-leading price. Image enhancements, such as wide dynamic range and high definition video, make our products well suited to capture remarkable detail in exterior and interior settings.



## RETAIL

Shop and restaurant owners have peace of mind when using Hikvision's high performing products, which are aesthetically pleasing to boot. In each camera category are compact bullet, turret, dome and covert varieties, which provide discreet surveillance in attractive packaging. POS integration, heat mapping, and special counting cameras provide significant business management information. Data collected can then be managed through Hikvision's smart recording equipment.

## GOVERNMENT

With strained budgets and changing priorities, safety remains an important issue for government facilities. Significant upgrades to existing analogue infrastructures are possible using our TurboHD™ line of HD-TVI solutions, which deliver HD analogue video without the high costs of networked systems.

## SAFE CITIES

Hikvision is dedicated to helping solve public safety issues by providing surveillance systems that address emergency response, disaster management, and overall public safety. A key responsibility of any city is to ensure the safety of its citizens.



## CRITICAL INFRASTRUCTURE

Hikvision's Smart Series and Speciality cameras offer performance and features that are ideal for critical security installations. Resolutions of 12 MP, 8 MP (4K), 6 MP and more deliver detailed video images. Darkfighter and Lightfighter solutions provide clear images in any lighting condition. Stainless-steel, high impact and weather-rated cameras withstand harsh environments. Built-in smart analytics provide pre- and post-event details. Data recording and storage products keep records safe and ready for forensic research. Every critical infrastructure setting has its own set of needs, and with Hikvision products, and these needs are all met.





**DARKFIGHTER**

## DARKFIGHTER ULTRA LOW-LIGHT CAMERAS

Advanced smart features enable Hikvision's new IP Darkfighter cameras to provide exceptionally sharp images even in low-light conditions, whether during the day or at night. Combining outstanding performance and wide range with convenience and ease of use, these sophisticated cameras are taking video surveillance to an entirely new level - the ideal security choice for warehouses, retail outlets, airports, and other sensitive sites.

## DARKFIGHTER GIVES YOU ALL THE DETAILS EVEN IN THE DARK



Footage registered by conventional surveillance cameras in low-light conditions is often of little value due to the diminished quality, detail and colours of images. Darkfighter cameras are equipped with 1/2" CMOS progressive scan sensors enabling them to obtain high quality images with good colour value in light levels as low as 0.002 lux, which the human eye perceives as total darkness. Darkfighter cameras are ideal for inconspicuous night time surveillance- their high sensitivity makes additional light sources unnecessary.

## DARKFIGHTER IS SMART SURVEILLANCE FOR SUPERIOR SECURITY IN ANY SITUATION



Sometimes image quality isn't enough, especially when it comes to special applications and security for high risk sites. Surveillance cameras often require sophisticated analytical capabilities to ensure they discriminate threats accurately and work reliably in any kind of situation. Features like Smart Defog, Smart Face Detection, Smart Audio Detection, Smart Intrusion Detection, Smart Line Crossing Detection and Smart Video Quality Diagnoses make Darkfighter cameras exceptionally intelligent and able to meet even the most challenging requirements.

## DETAILED, HIGH-DEFINITION IMAGES DARKFIGHTER DELIVERS 2 MP FULL HD RESOLUTION



No other camera can match Darkfighter's combination of advanced analytical capabilities, superior performance in challenging conditions and megapixel HD resolution (1920X1080 at 50fps). And that's not all. Darkfighter cameras also feature the Smart Dynamic Roi (Region of Interest) codec, which focuses encoding on a predefined area. Since they save the highest resolution images for the details that really matter, Darkfighter cameras are able to make the most out of two megapixels. Combined, these features make up a camera that has set a new benchmark for professional video surveillance technology.





# DEEP LEARNING

DELIVERED BY

DEEPINMIND

BACK-END NVRS

DEEPINVIEW

FRONT-END CAMERAS



## IP CAMERAS

Hikvision has a wide range of IP cameras that bring intelligence, efficiency and varied specifications to a wide range of vertical applications.

Cutting-edge features, like DarkFighter technology and Hikvision's unique H.265+ compression codec provide outstanding image quality, even in challenging lighting environments. Camera form factors vary from box cameras, indoor and outdoor domes and bullets – right up to anti-corrosion, panoramic and people counting cameras.

The cameras are split into four areas: the Solution Series, aimed at equipping customers for a full solution; the Project Series, which provides high-quality, scalable cameras for even the most challenging project; the Economic Series, for those with limited budgets and the ANPR Series for traffic solutions.

## FISHEYE CAMERA



NEW



NEW



| Short Description        | 3MP Network Fisheye Camera                                                              | 5MP Network Fisheye Camera                                                              | 12 MP Network Fisheye Camera                                                                                                                                         | 6 MP Network Fisheye Camera                                                                                                                                    | 3.0 MP Network Fisheye Camera                                                                                                                                |
|--------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                    | DS-2CD3935G0-IS                                                                         | DS-2CD3955G0-IS                                                                         | DS-2CD63C2F-I(V)(S)                                                                                                                                                  | DS-2CD6362F-I(V)(S)                                                                                                                                            | DS-2CD6332FWD-I                                                                                                                                              |
| Image Sensor             | 1/2.8" Progressive Scan CMOS                                                            | 1/2.5" Progressive Scan CMOS                                                            | 1/1.7" Progressive Scan CMOS                                                                                                                                         | 1/1.8" Progressive Scan CMOS                                                                                                                                   | 1/3" Progressive Scan CMOS                                                                                                                                   |
| Min. Illumination(Color) | 0.005Lux @ (F1.2, AGC ON), 0 Lux with IR on                                             | 0.01Lux @ (F1.2, AGC ON), 0 Lux with IR on                                              | 0.01 Lux @ (F1.2, AGC ON)                                                                                                                                            | 0.05 Lux @ (F1.2, AGC ON)                                                                                                                                      | 0.1 Lux @ (F1.2, AGC ON)                                                                                                                                     |
| Lens option              | 1.6mm                                                                                   | 1.05 mm                                                                                 | 2mm                                                                                                                                                                  | 1.27mm                                                                                                                                                         | 1.19mm                                                                                                                                                       |
| Horizontal Angle of View | 180°                                                                                    | 180°                                                                                    | 360°                                                                                                                                                                 | 360°                                                                                                                                                           | 360°                                                                                                                                                         |
| Video Compression        | Main stream: H.265/H.264Sub stream: H.265/H.264/MJPEG                                   | Main stream: H.265/H.264Sub stream: H.265/H.264/MJPEG                                   | H.264/MJPEG                                                                                                                                                          | H.264/MJPEG                                                                                                                                                    | H.264/MJPEG                                                                                                                                                  |
| Max. Image Resolution    | 2048 × 1536                                                                             | 2560 × 1920                                                                             | 4000 × 3072                                                                                                                                                          | 3072 × 2048                                                                                                                                                    | 2048 × 1536                                                                                                                                                  |
| WDR                      | 120dB                                                                                   | 120dB                                                                                   | Digital WDR                                                                                                                                                          | Digital WDR                                                                                                                                                    | 120dB                                                                                                                                                        |
| Operations Conditions    | Temperature:-10 °C to +50 °C (-14 °F to +122 °F), humidity 95% or less (non-condensing) | Temperature:-10 °C to +50 °C (-14 °F to +122 °F), humidity 95% or less (non-condensing) | Indoor temperature: -10 °C to +50 °C (14 °F to +122 °F)With -V model: Outdoor temperature: -30 °C to +60 °C (-22 °F to +140 °F)Humidity 95% or less (non-condensing) | Indoor temperature: -10 °C to +50 °C (14 °F – 122 °F)With -V model: Outdoor temperature: -30 °C – 60 °C (-22 °F – 140 °F)Humidity 95% or less (non-condensing) | Indoor temperature: -10 °C – 50 °C (14 °F – 122 °F)With -V model: Outdoor temperature: -30 °C – 60 °C (-22 °F – 140 °F)Humidity 95% or less (non-condensing) |
| Power Supply             | DC 12V ± 25%, 2A,PoE(802.3af 36-57V, class 3), 0.4 – 0.7 A                              | DC 12V ± 25%, 2A,PoE(802.3af 36-57V, class 3), 0.4 – 0.7 A                              | DC 12 V ± 10%, 0.94 APoE (802.3at, class 4), 0.41 – 0.26 A                                                                                                           | DC 12 V ± 10%, 0.78APoE (802.3af, class 3), 0.33 – 0.21A                                                                                                       | 12 V DC ± 10%, PoE (802.3af)                                                                                                                                 |
| Consumption              | -                                                                                       | -                                                                                       | Max. 14.7 W                                                                                                                                                          | Max. 12W                                                                                                                                                       | 12 V DC ± 10%: Max. 9.3 WPoE (802.3af): Max. 12.18 W                                                                                                         |
| IR Range                 | 8m                                                                                      | 8m                                                                                      | 15m                                                                                                                                                                  | 15m                                                                                                                                                            | 15m                                                                                                                                                          |
| Weatherproof             | -                                                                                       | -                                                                                       | IP66                                                                                                                                                                 | -                                                                                                                                                              | -                                                                                                                                                            |
| Protection level         | -                                                                                       | -                                                                                       | IK10                                                                                                                                                                 | IK10                                                                                                                                                           | IK10                                                                                                                                                         |
| Audio Input/Output       | 1/1                                                                                     | 1/1                                                                                     | 1/1                                                                                                                                                                  | 1/1                                                                                                                                                            | -                                                                                                                                                            |
| Alarm Input/Output       | 1/1                                                                                     | 1/1                                                                                     | 1/1                                                                                                                                                                  | 1/1                                                                                                                                                            | -                                                                                                                                                            |

## COVERT CAMERA



## FIXED BULLET CAMERA



NEW

## FIXED DOME CAMERA



NEW

## FIXED TURRET CAMERA



NEW

| Short Description        | 2MP Covert Network Camera                                                              | 1.3MP Covert Network Camera                                            | 2MP Ultra-light Mini Bullet Network Camera                                               | 2 MP Ultra-Low Light Network Dome Camera                                                 | 2MP Ultra-Low Light Network Turret Camera                                        |
|--------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Model                    | DS-2CD6424FWD-10/20/30                                                                 | DS-2CD6412FWD-C1/C2/L10/L20/L30                                        | DS-2CD302560-I                                                                           | DS-2CD312560-IS                                                                          | DS-2CD332560-I                                                                   |
| Image Sensor             | 1/2.7" Progressive Scan CMOS                                                           |                                                                        | 1/2.8" Progressive Scan CMOS                                                             | 1/2.8" Progressive Scan CMOS                                                             | 1/2.5" Progressive Scan CMOS                                                     |
| Min. Illumination(Color) | 0.01Lux @(F1.2, AGC ON);                                                               |                                                                        | Color: 0.005 lux @(F1.2, AGC ON), 0 lux with IR                                          | Color: 0.005 lux @(F1.2, AGC ON), 0 lux with IR                                          | 0.005 lux @(F1.2, AGC ON), 0 lux with IR                                         |
| Lens option              | 3.7mm                                                                                  |                                                                        | 2.8mm                                                                                    | 2.8mm                                                                                    | 2.8 mm                                                                           |
| Horizontal Angle of View | 78.5°                                                                                  |                                                                        | Horizontal FOV:108°                                                                      | Horizontal FOV:108°                                                                      | Horizontal FOV:108°                                                              |
| Video Compression        | H.264+ /H.264/MJPEG                                                                    | H.264/MJPEG4/MPEG                                                      | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264         | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264         | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264 |
| Max. Image Resolution    | 1920×1080                                                                              | 1280 × 960                                                             | 1920 × 1080                                                                              | 1920 × 1080                                                                              | 1920 × 1080                                                                      |
| WDR                      | 120dB                                                                                  | 120dB                                                                  | 120dB                                                                                    | 120dB                                                                                    | 120dB                                                                            |
| Operations Conditions    | Temperature : -30 °C to 60 °C (-22 °F to 140 °F) Humidity 95% or less (non-condensing) | -30 °C – 60 °C (-22 °F – 140 °F) Humidity 95% or less (non-condensing) | Temperature: -30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing) | Temperature: -30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing) | -30°C +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)          |
| Power Supply             | 12 VDC ± 10%/PoE (802.3af) (Class 3)                                                   | 12 VDC ± 10% / PoE (802.3af)                                           | 12 VDC ± 25%/PoE(802.3af, class 3)                                                       | 12 VDC ± 25%/PoE(802.3af, class 3)                                                       | 12 VDC ± 25%/PoE(802.3af, 42.5 – 57V, class 3)                                   |
| Consumption              | Max. 6.5 W                                                                             | Max. 8.26 W                                                            | -                                                                                        | -                                                                                        | -                                                                                |
| IR Range                 | -                                                                                      | -                                                                      | 30m                                                                                      | 30m                                                                                      | 30m                                                                              |
| Weatherproof             | IP66                                                                                   | -                                                                      | IP67                                                                                     | IP67                                                                                     | IP67                                                                             |
| Protection level         | -                                                                                      | -                                                                      | -                                                                                        | IK10                                                                                     | -                                                                                |
| Audio Input/Output       | -                                                                                      | 1/1                                                                    | -                                                                                        | 1/1                                                                                      | -                                                                                |
| Alarm Input/Output       | -                                                                                      | 1/1                                                                    | -                                                                                        | 1/1                                                                                      | -                                                                                |



|                          | FIXED MINI DOME CAMERA                                                                            | VARI-FOCAL BULLET CAMERA                                                                                                 | VARI-FOCAL DOME CAMERA                                                                                                   | VARI-FOCAL TURRET CAMERA                                                                                                 | BOX CAMERA                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
|                          |  <b>NEW</b>      |                                         |  <b>NEW</b>                           |                                       |  <b>DARK FIGHTER</b> <b>NEW</b> |
| Short Description        | <b>2 MP EXIR Fixed Mini Dome Network Camera</b>                                                   | <b>2MP WDR Vari-focal Network Bullet Camera</b>                                                                          | <b>2MP WDR Vari-focal Network Dome Camera</b>                                                                            | <b>2 MP WDR Vari-focal Network Turret Camera</b>                                                                         | <b>2 MP Smart Network Box Camera</b>                                                                               |
| Model                    | DS-2CD3525G0-I(W)(S)                                                                              | DS-2CD3625G0-IZS                                                                                                         | DS-2CD3725G0-IZS                                                                                                         | DS-2CD3H25G0-IZS                                                                                                         | DS-2CD5026G0-AP                                                                                                    |
| Image Sensor             | 1/2.8" Progressive Scan CMOS                                                                      | 1/2.8" Progressive Scan CMOS                                                                                             | 1/2.8" Progressive Scan CMOS                                                                                             | 1/2.8" Progressive Scan CMOS                                                                                             | 1/1.8 " Progressive Scan CMOS                                                                                      |
| Min. Illumination(Color) | Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR; Color: 0.009 lux @(F1.6, AGC ON), 0 lux with IR | Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR; Color: 0.0068 Lux @ (F1.4, AGC ON), 0 Lux with IR                      | Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR; Color: 0.0068 Lux @ (F1.4, AGC ON), 0 Lux with IR                      | Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR; Color: 0.0068 Lux @ (F1.4, AGC ON), 0 Lux with IR                      | Color: 0.002 Lux @ (F1.2, AGC ON)                                                                                  |
| Lens option              | 2.8mm                                                                                             | 2.8-12mm                                                                                                                 | 2.8-12mm                                                                                                                 | 2.8 -12 mm                                                                                                               | -                                                                                                                  |
| Horizontal Angle of View | Horizontal FOV:108°                                                                               | Horizontal FOV:105° to 35°                                                                                               | Horizontal FOV:105° to 35°                                                                                               | Horizontal FOV: 105°to 35°                                                                                               | -                                                                                                                  |
| Video Compression        | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG                                            | Main stream: H.265+/H.265/H.264+/H.264Sub stream: H.265+/H.265/H.264+/H.264/MJPEGThird stream: H.265+/H.265/H.264+/H.264 | Main stream: H.265+/H.265/H.264+/H.264Sub stream: H.265+/H.265/H.264+/H.264/MJPEGThird stream: H.265+/H.265/H.264+/H.264 | Main stream: H.265+/H.265/H.264+/H.264Sub stream: H.265+/H.265/H.264+/H.264/MJPEGThird stream: H.265+/H.265/H.264+/H.264 | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG       |
| Max. Image Resolution    | 1920 × 1080                                                                                       | 1920 × 1080                                                                                                              | 1920 × 1080                                                                                                              | 1920 × 1080                                                                                                              | 1920 × 1080                                                                                                        |
| WDR                      | 120dB                                                                                             | 120dB                                                                                                                    | 120dB                                                                                                                    | 120dB                                                                                                                    | 140dB                                                                                                              |
| Operations Conditions    | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)            | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                                   | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                                   | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                                   | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                             |
| Power Supply             | 12 VDC ± 25%, PoE (802.3af, class 3)                                                              | 12 VDC ± 25%/PoE(802.3af, 42.5 – 57V, class 3)                                                                           | 12 VDC ± 25%, PoE (802.3at)Terminal block for DC input                                                                   | 12 VDC ± 25%, PoE (802.3af)Terminal block for DC input                                                                   | 12 VDC ± 20%, 24 VAC ± 20%, PoE (802.3af, class 3) Terminal block for DC and AC input                              |
| Consumption              | 12 VDC, 0.625A, max. 7.5W PoE (802.3af, 36V to 57V), 0.26 A to 0.17 A, max. 9.5W                  | 12 VDC, 0.625A, max. 7.5W PoE (802.3af, 36V to 57V), 0.26 A to 0.17 A, max. 9.5W                                         | 12 VDC, 1.3A, max. 15.5W PoE (802.3at, 42.5V to 57V), 0.5A to 0.1A, max. 17.5W                                           | Max. 10W                                                                                                                 | 12 VDC ± 20%, 0.6 A, max. 7 W 24 VAC ± 20%, 0.3 A, max. 7 W PoE (802.3af, 36V to 57V), 0.1 A to 0.3 A              |
| IR Range                 | Up to 10 m                                                                                        | 30m                                                                                                                      | 30m                                                                                                                      | Up to 30 m                                                                                                               | -                                                                                                                  |
| Weatherproof             | IP66                                                                                              | IP67                                                                                                                     | IP67                                                                                                                     | IP67                                                                                                                     | -                                                                                                                  |
| Protection level         | IK08                                                                                              | IK10                                                                                                                     | IK10                                                                                                                     | IK10                                                                                                                     | -                                                                                                                  |
| Audio Input/Output       | 2/1(-S)                                                                                           | 1/1                                                                                                                      | 1/1                                                                                                                      | 1/1                                                                                                                      | 1/1                                                                                                                |
| Alarm Input/Output       | 1/1(-S)                                                                                           | 1/1                                                                                                                      | 1/1                                                                                                                      | 1/1                                                                                                                      | 2/2                                                                                                                |



NEW



DARKFIGHTER

NEW



DARKFIGHTER

NEW



NEW



DARKFIGHTER

NEW

## VARI-FOCAL DOME CAMERA

| Short Description        | DarkfighterX 2 MP Outdoor Smart Camera                                                | 8 MP Smart Network Box Camera                                                                                | 2 MP VF Dome Network Camera                                                                                  | 8 MP VF Dome Network Camera                                                                                  | 2 MP VF Dome Network Camera                                                                                  |
|--------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Model                    | DS-2CD5028G0/E-HI                                                                     | DS-2CD5085G0-AP                                                                                              | DS-2CD5126G0-IZS                                                                                             | DS-2CD5185G0-IZS                                                                                             | DS-2CD5526G0-IZHS(Y)                                                                                         |
| Image Sensor             | Dual-sensor, 1/2.8" Progressive Scan CMOS                                             | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8 " Progressive Scan CMOS                                                                                |
| Min. Illumination(Color) | Color: 0.0005 Lux @ (F1.5, AGC ON), B/W: 0.0001Lux @ (F1.5, AGC ON), 0 Lux with IR    | Color: 0.009 Lux @ (F1.2, AGC ON)                                                                            | Color: 0.002 Lux @ (F1.2, AGC ON),0 Lux with IR                                                              | Color: 0.009 Lux @ (F1.2, AGC ON),0 Lux with IR                                                              | Color: 0.002 Lux @ (F1.2, AGC ON) ,0 Lux with IR                                                             |
| Lens option              | 5-50mm                                                                                | -                                                                                                            | 2.8-12 mm                                                                                                    | 2.8-12 mm                                                                                                    | 2.8-12 mm                                                                                                    |
| Horizontal Angle of View | Horizontal FOV: 60.5° to 6.3°                                                         | -                                                                                                            | Horizontal FOV 103.3° to 38.6°                                                                               | Horizontal FOV 112.4° to 41°                                                                                 | Horizontal FOV 103.3° to 38.6°                                                                               |
| Video Compression        | Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264      | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG |
| Max. Image Resolution    | 1920 × 1080                                                                           | 3840 × 2160                                                                                                  | 1920 × 1080                                                                                                  | 3840 × 2160                                                                                                  | 1920 × 1080                                                                                                  |
| WDR                      | DWDR                                                                                  | 120dB                                                                                                        | 140dB                                                                                                        | 120dB                                                                                                        | 140dB                                                                                                        |
| Operations Conditions    | Temperature:-40 °C to 60 °C (-40 °F to 140 °F), humidity 95% or less (non-condensing) | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                       | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                       | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)                       | Temperature:-40 °C to 60 °C (-40 °F to 140 °F), humidity 95% or less (non-condensing)                        |
| Power Supply             | 24 VAC ± 20%, terminal block                                                          | 12 VDC ± 20%, 24 VAC ± 20%, PoE (802.3af, class 3) Terminal block for DC and AC input                        | 12 VDC ± 20%, two-core terminal block PoE (802.3af, class 3): 36 V to 57 V                                   | 12 VDC ± 20%, two-core terminal block PoE (802.3af, class 3): 36 V to 57 V                                   | 12 VDC ± 20%, two-core terminal block PoE (802.3af, class 3): 42.5 V to 57 V                                 |
| Consumption              | 24 VAC ± 20% Heater off: max. 35W/1.5A<br>Heater on: max. 43W/1.79A                   | 12 VDC ± 20%, 0.6 A, max. 7 W 24 VAC ± 20%, 0.3 A, max. 7 W PoE (802.3af, 36V to 57V), 0.1 A to 0.3 A        | 12 VDC ± 20%: 0.7 A, max. 8 W PoE (802.3af, class 3): 36 V to 57 V): 0.3 A to 0.2 A                          | 12 VDC ± 20%: 0.7 A, max 8 W PoE (802.3af 36 V to 57 V): 0.3 A to 0.2 A, max. 9.0W                           | 12 VDC ± 20%: 1.1 A, max. 14 W, PoE (802.3af, class 3): 42.5 V to 57 V, 0.3 A to 0.4 A                       |
| IR Range                 | Up to 100 m                                                                           | -                                                                                                            | Up to 30 m                                                                                                   | Up to 30 m                                                                                                   | Up to 30 m                                                                                                   |
| Weatherproof             | IP66                                                                                  | -                                                                                                            | -                                                                                                            | -                                                                                                            | IP67                                                                                                         |
| Protection level         | -                                                                                     | -                                                                                                            | IK10                                                                                                         | IK10                                                                                                         | IK10                                                                                                         |
| Audio Input/Output       | 1/1                                                                                   | 1/1                                                                                                          | 1/1                                                                                                          | 1/1                                                                                                          | 1/1                                                                                                          |
| Alarm Input/Output       | 2/2                                                                                   | 2/2                                                                                                          | 1/1                                                                                                          | 1/1                                                                                                          | 1/1                                                                                                          |

|                          | VARI-FOCAL BULLET CAMERA                                                                                     |                                                                                                              |                                                                                                              | ANTI-CORROSION VARI-FOCAL BULLET CAMERA                                             |                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|                          |                             |  <b>NEW</b>                 |  <b>NEW</b>               |  |  <b>NEW</b> |
| Short Description        | 8 MP VF Dome Network Camera                                                                                  | 2 MP VF Bullet Network Camera                                                                                | 8 MP VF Bullet Network Camera                                                                                | 2 MP Ultra Low-Light Anti-Corrosion Bullet Camera                                   | 2 MP Anti-Corrosion Bullet Camera                                                              |
| Model                    | DS-2CD5585G0-IZHS(Y)                                                                                         | DS-2CD5A26G0-IZHS(Y)                                                                                         | DS-2CD5A85G0-IZHS(Y)                                                                                         | DS-2CD6626B/E-HIRA                                                                  | DS-2CD6626B-IZHS                                                                               |
| Image Sensor             | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8 " Progressive Scan CMOS                                                                                | 1/1.8" progressive scan CMOS                                                        | 1/1.8 " Progressive Scan CMOS                                                                  |
| Min. Illumination(Color) | Color: 0.009 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                             | Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                             | Color: 0.009 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                             | Color: 0.002 Lux @ (F1.2, AGC ON) B/W: 0.0002 Lux @ (F1.2, AGC ON)                  | Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR                                               |
| Lens option              | 2.8-12 mm                                                                                                    | 2.8-12 mm                                                                                                    | 2.8-12 mm                                                                                                    | 11-40mm                                                                             | 2.8 – 12 mm                                                                                    |
| Horizontal Angle of View | Horizontal FOV 112.4° to 41°                                                                                 | Horizontal FOV 103.3° to 38.6°                                                                               | Horizontal FOV 112.4° to 41°                                                                                 | Horizontal FOV: 36.7° to 11.5°                                                      | Horizontal FOV: 90.1° to 31°                                                                   |
| Video Compression        | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/fifth stream/custom stream: H.265/H.264/MJPEG | H.264/MJPEG/MJPEG4                                                                  | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264               |
| Max. Image Resolution    | 3840 × 2160                                                                                                  | 1920 × 1080                                                                                                  | 3840 × 2160                                                                                                  | 1920 × 1080                                                                         | 1920 × 1080                                                                                    |
| WDR                      | 120dB                                                                                                        | 140dB                                                                                                        | 120dB                                                                                                        | 120 dB                                                                              | 120 dB                                                                                         |
| Operations Conditions    | Temperature:-40 °C to 60 °C (-40 °F to 140 °F), humidity 95% or less (non-condensing)                        | Temperature:-40 °C to 60 °C (-40 °F to 140 °F), humidity 95% or less (non-condensing)                        | Temperature:-40 °C to 60 °C (-40 °F to 140 °F), humidity 95% or less (non-condensing)                        | Temperature:-40°C to +60°C (-40°F to +140°F), Humidity 95% or less (non-condensing) | Temperature:-40°C to +60°C (-40°F to +140°F), Humidity 95% or less (non-condensing)            |
| Power Supply             | 12 VDC ± 20%, two-core terminal block PoE (802.3at, class 3): 42.5 V to 57 V                                 | 12 VDC ± 20%, two-core terminal block PoE (802.3at, class 4)                                                 | 12 VDC ± 20%, two-core terminal block PoE (802.3at, class 4)                                                 | 24 V AC                                                                             | AC24V, 1.7A, terminal block                                                                    |
| Consumption              | 12 VDC ± 20%: 1.1 A, max. 14 W, PoE (802.3at, class 3): 42.5 V to 57 V, 0.3 A to 0.4 A                       | 12 VDC, 1.3 A, max. 15 W; PoE (802.3at, 42.5 V to 57 V), 0.4 A to 0.3 A                                      | 12 VDC, 1.3 A, max. 15 W; PoE (802.3at, 42.5 V to 57 V), 0.4 A to 0.3 A                                      | Max. 100 W                                                                          | Max. 40 W                                                                                      |
| IR Range                 | Up to 30 m                                                                                                   | Up to 50 m                                                                                                   | Up to 50 m                                                                                                   | Up to 100 m                                                                         | Up to 80 m                                                                                     |
| Weatherproof             | IP67                                                                                                         | IP67                                                                                                         | IP67                                                                                                         | IP67                                                                                | IP67                                                                                           |
| Protection level         | IK10                                                                                                         | IK10                                                                                                         | IK10                                                                                                         | WF2, C5-M, NEMA-4X                                                                  | C5-M, NEMA 4X                                                                                  |
| Audio Input/Output       | 1/1                                                                                                          | -                                                                                                            | -                                                                                                            | 1/1                                                                                 | 1/1                                                                                            |
| Alarm Input/Output       | 1/1                                                                                                          | 2/2                                                                                                          | 2/2                                                                                                          | 1/1                                                                                 | 1/1                                                                                            |

## VARI-FOCAL PANOVO CAMERA



NEW

## VARI-FOCAL BULLET CAMERA



## Short Description

EXIR Flexible PanoVu Network Camera

2MP Smart IP Outdoor Bullet Camera

|                          |                                                                                                                                            |                                                                                             |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Model                    | DS-2CD6D54FWD-IZS(/NFC)                                                                                                                    | DS-2CD4A24FWD-IZHS                                                                          |
| Image Sensor             | 1/2.7" Progressive Scan CMOS                                                                                                               | 1/2.8" Progressive Scan CMOS                                                                |
| Min. Illumination(Color) | Color: 0.006 Lux @ (F1.2, AGC ON), 0.010 Lux @ (F1.6, AGC ON) B/W: 0.002 Lux @ (F1.2, AGC ON); 0.003 Lux @ (F1.6, AGC ON) 0 Lux with IR on | 0.005 Lux @ (F1.2, AGC ON), 0 lux with IR0.007 Lux @ (F1.4, AGC ON), 0 lux with IR          |
| Lens option              | 2.8 -12 mm                                                                                                                                 | 4.7-94mm                                                                                    |
| Horizontal Angle of View | Horizontal FOV: 30° to 101°                                                                                                                | 53.8°~3.1°                                                                                  |
| Video Compression        | Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264                                                           | H.264+/H.264/MJPEG/MPEG4                                                                    |
| Max. Image Resolution    | 2560 x 1920                                                                                                                                | 1920 × 1080                                                                                 |
| WDR                      | 120dB                                                                                                                                      | 120dB                                                                                       |
| Operations Conditions    | Temperature:-40 °C to 60 °C (-40 °F to 140 °F) Humidity 95% or less (non-condensing)                                                       | -30 °C – 60 °C (-22 °F – 140 °F), Humidity 95% or less (non-condensing), -H: -40 °C – 60 °C |
| Power Supply             | 12 VDC ± 20%, 24 VAC ± 20% (for customization), three-core terminal block,Hi-PoE: 42.5 VDC to 57 VDC                                       | 12 V DC ± 10%, PoE                                                                          |
| Consumption              | 12 VDC ± 20%: max. 28 W/2.3 A 24 VAC ± 20%, max. 50 to 60 Hz/2.5 A (for customization) Hi-PoE: 42.5 VDC to 57 VDC, max. 38W/0.9 A to 0.6 A | DC: 10.8W, (-H: max 13W)PoE: 15W(-H: max 18W)                                               |
| IR Range                 | 10 m to 30 m                                                                                                                               | Up to 120m                                                                                  |
| Weatherproof             | IP67                                                                                                                                       | IP67                                                                                        |
| Protection level         | IK10                                                                                                                                       | -                                                                                           |
| Audio Input/Output       | 1/1                                                                                                                                        | 1/1                                                                                         |
| Alarm Input/Output       | 2/2                                                                                                                                        | 1/1                                                                                         |

|                          | BOX CAMERA                                                                                                     | VARI-FOCAL DOME CAMERA                                                                                         |                                                                                                                | VARI-FOCAL BULLET CAMERA                                                                                                     | PEOPLE COUNTING CAMERA                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                          |  <b>NEW</b>                   |  <b>NEW</b>                   |  <b>NEW</b>                 |  <b>NEW</b>                               |  |
| Short Description        | <b>2 MP Box Network Camera</b>                                                                                 | <b>2 MP VF Dome Network Camera</b>                                                                             | <b>2 MP VF Dome Network Camera</b>                                                                             | <b>2 MP VF Bullet Network Camera</b>                                                                                         | <b>Dual-Lens People Counting Camera</b>                                             |
| Model                    | DS-2CD7026G0-AP                                                                                                | DS-2CD7126G0/L-IZS                                                                                             | DS-2CD7126G0-IZS                                                                                               | DS-2CD7A26G0-IZHS                                                                                                            | iDS-2CD6810F/C                                                                      |
| Image Sensor             | 1/1.8 " Progressive Scan CMOS                                                                                  | 1/1.8 " Progressive Scan CMOS                                                                                  | 1/1.8 " Progressive Scan CMOS                                                                                  | 1/1.8 " Progressive Scan CMOS                                                                                                | 1/3" Progressive Scan CMOS                                                          |
| Min. Illumination(Color) | Color: 0.002 Lux @ (F1.2, AGC ON), B/W: 0.0002 Lux @ (F1.2, AGC ON)                                            | Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                               | Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                               | Color: 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                             | -                                                                                   |
| Lens option              | -                                                                                                              | 2.8-12mm                                                                                                       | 2.8-12mm                                                                                                       | 2.8-12mm                                                                                                                     | 2.8 mm                                                                              |
| Horizontal Angle of View | -                                                                                                              | Horizontal FOV: 103.3° to 38.6°                                                                                | Horizontal FOV: 103.3° to 38.6°                                                                                | Horizontal FOV: 103.3° to 38.6°                                                                                              | 82°                                                                                 |
| Video Compression        | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/ fifth stream/custom stream: H.265/H.264/ MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/ fifth stream/custom stream: H.265/H.264/ MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/ fifth stream/custom stream: H.265/H.264/ MJPEG | Main stream: H.265/H.264 Sub stream/third stream/fourth stream/ fifth stream/custom stream: H.265/H.264/ MJPEG               | Main stream: H.264Sub stream: H.264                                                 |
| Max. Image Resolution    | 1920 × 1080                                                                                                    | 1920 × 1080                                                                                                    | 1920 × 1080                                                                                                    | 1920 × 1080                                                                                                                  | 640 × 960                                                                           |
| WDR                      | 140 dB                                                                                                         | 140 dB                                                                                                         | 140 dB                                                                                                         | 140 dB                                                                                                                       | -                                                                                   |
| Operations Conditions    | Temperature:-30°C to +60°C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)                          | Temperature:-30°C to +60°C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)                          | Temperature:-30°C to +60°C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)                          | Temperature:-30 °C to 60 °C (-22 °F to 140 °F), -H: -40 °C to 60 °C (-40 °F to 140 °F) Humidity 95% or less (non-condensing) | -10 °C to + 40 °C (+14 °F to +104 °F), Humidity 10% to 90%, no condensing           |
| Power Supply             | 12 VDC ± 20%, 24 VAC± 20%, terminal block; PoE (802.3af, class 3)                                              | 12 VDC ± 20%, three-core terminal block; PoE (802.3af, class 3)                                                | 12 VDC ± 20%, three-core terminal block; PoE (802.3af, class 3)                                                | 12 VDC ± 20%, two-core terminal block; PoE (802.3at, class 4)                                                                | DC 12 ± 25%                                                                         |
| Consumption              | 12 VDC, 0.6 A, max. 7 W; 24 VAC, 0.3 A, max 7 W; PoE (802.3af, 36 V to 57 V), 0.1 A to 0.3 A                   | 12 VDC ± 20%, 0.7 A, max. 8 W; PoE (802.3af, 36 V to 57 V), 0.3 A to 0.2 A                                     | 12 VDC ± 20%, 0.7 A, max. 8 W; PoE (802.3af, 36 V to 57 V), 0.3 A to 0.2 A                                     | 12 VDC, 1.3 A, max. 15 W; PoE (802.3at, 42.5 V to 57 V), 0.4 A to 0.3 A                                                      | Max. 7 W                                                                            |
| IR Range                 | -                                                                                                              | Up to 30 m                                                                                                     | Up to 30 m                                                                                                     | Up to 50 m                                                                                                                   | -                                                                                   |
| Weatherproof             | -                                                                                                              | -                                                                                                              | -                                                                                                              | IP67                                                                                                                         | -                                                                                   |
| Protection level         | -                                                                                                              | IK10                                                                                                           | IK10                                                                                                           | IK10                                                                                                                         | -                                                                                   |
| Audio Input/Output       | 1/1                                                                                                            | 1/1                                                                                                            | 1/1                                                                                                            | -                                                                                                                            | -                                                                                   |
| Alarm Input/Output       | 2/2                                                                                                            | 1/1                                                                                                            | 1/1                                                                                                            | 2/2                                                                                                                          | 1/1                                                                                 |





NEW



NEW



NEW



NEW

| Short Description        | Outdoor Dual-Lens People Counting Camera                                              | DeepinView Dual-Lens Behavior Analysis Camera                                                                                               | DeepinView Dual-Lens Face Recognition Camera                                                                                                | 2 MP VF ANPR Bullet Network Camera                                                                  |
|--------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Model                    | iDS-2CD6810F-IV/C                                                                     | iDS-2CD8426G0/B-I                                                                                                                           | iDS-2CD8426G0/F-I                                                                                                                           | iDS-2CD8626G0/P-IZS                                                                                 |
| Image Sensor             | 1/3 " Progressive Scan CMOS                                                           | 1/2.8 " Progressive Scan CMOS ×2                                                                                                            | 1/2.8 " Progressive Scan CMOS ×2                                                                                                            | 1/1.8 " Progressive Scan CMOS                                                                       |
| Min. Illumination(Color) | -                                                                                     | Color: 0.005 Lux @ (F1.2, AGC ON) Color: 0.0089 Lux @(F1.6, AGC ON) 0 Lux with IR ON                                                        | Color: 0.005 Lux @ (F1.2, AGC ON) Color: 0.0089 Lux @(F1.6, AGC ON) 0 Lux with IR ON                                                        | Color: 0.002 Lux @ (F1.2, AGC ON); 0.031 Lux @ (F1.5, AGC ON), 0 Lux with white light on            |
| Lens option              | 2.8 mm                                                                                | 4 mm × 2                                                                                                                                    | 4 mm × 2                                                                                                                                    | 2.8-12 mm                                                                                           |
| Horizontal Angle of View | Horizontal FOV: 83°                                                                   | Horizontal FOV: 85.7°                                                                                                                       | Horizontal FOV: 85.7°                                                                                                                       | Horizontal FOV: 81.8° to 31.2°                                                                      |
| Video Compression        | Main stream: H.264 Sub-stream: H.264                                                  | Main stream: H.265/H.264 Sub stream: H.265/H.264/MPEG4/MJPEG Third stream: H.265/H.264 Fourth stream: H.265/H.264 Fifth stream: H.265/H.264 | Main stream: H.265/H.264 Sub stream: H.265/H.264/MPEG4/MJPEG Third stream: H.265/H.264 Fourth stream: H.265/H.264 Fifth stream: H.265/H.264 | Main stream/third stream: H.265/H.264 Sub-stream, fourth stream and fifth stream: H.265/H.264/MJPEG |
| Max. Image Resolution    | 640 × 960                                                                             | 1920 × 1080                                                                                                                                 | 1920 × 1080                                                                                                                                 | 1920 × 1080                                                                                         |
| WDR                      | -                                                                                     | 120dB                                                                                                                                       | 120dB                                                                                                                                       | 120dB                                                                                               |
| Operations Conditions    | Temperature:-30°C to +60°C (-22 °F to +140 °F), Humidity 95% or less (non-condensing) | Temperature:-10 °C to 40 °C (-14 °F to 104 °F) Humidity 95% or less (non-condensing)                                                        | Temperature:-10 °C to 40 °C (-14 °F to 104 °F) Humidity 95% or less (non-condensing)                                                        | Temperature:-30 °C to 60 °C (-22 °F to 140 °F) Humidity 95% or less (non-condensing)                |
| Power Supply             | 12 VDC ± 25%, terminal block PoE (802.3af, class 3)                                   | 36 VDC, two-core terminal block                                                                                                             | 36 VDC, two-core terminal block                                                                                                             | 36 VDC, three-core terminal block                                                                   |
| Consumption              | 12 VDC, max. 7 W, 0.6A PoE(802.3af, 36 V to 57 V), max. 7 W, 0.2 A to 0.13 A          | 36 VDC, max. 27 W, 0.75A                                                                                                                    | 36 VDC, max. 27 W, 0.75A                                                                                                                    | 36 VDC, 1 A, max. 35 W                                                                              |
| IR Range                 | Up to 5 m                                                                             | Up to 10 m                                                                                                                                  | Up to 10 m                                                                                                                                  | Up to 100 m                                                                                         |
| Weatherproof             | IP66                                                                                  | -                                                                                                                                           | -                                                                                                                                           | IP67                                                                                                |
| Protection level         | -                                                                                     | -                                                                                                                                           | -                                                                                                                                           | IK10                                                                                                |
| Audio Input/Output       | -                                                                                     | 1/1                                                                                                                                         | 1/1                                                                                                                                         | 1/1                                                                                                 |
| Alarm Input/Output       | 2/1                                                                                   | 1/1                                                                                                                                         | 1/1                                                                                                                                         | 2/2                                                                                                 |

An abstract graphic in the top-left corner consisting of several overlapping, semi-transparent triangles in various shades of gray, creating a star-like or crystalline shape.

## ANPR CAMERAS

The ANPR (Automatic Number Plate Recognition) series ultra-low light smart cameras are able to capture and recognise vehicle number plates of various countries and regions in a dim light environment. They have a dedicated firmware written for the specific needs of traffic management.

## BULLET CAMERA



NEW



## BOX CAMERA



## Short Description

2 MP ANPR Ultra-Low Light Bullet Camera

2 MP ANPR Ultra-Low Light Bullet Camera

2 MP ANPR Ultra-Low Light Bullet Camera

2 MP ANPR Low Light Box Camera with Housing

|                                |                                                                                                    |                                                                                                    |                                                                                                    |                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Model                          | DS-2CD4A26FWD-IZ(H)S/P                                                                             | DS-2CD4A26FWD-IZSWG/P                                                                              | DS-2CD4A26FWD-LZS/P                                                                                | DS-2CD4026FWD/P-L                                                                                  |
| Image Sensor                   | 1/1.8" progressive scan CMOS                                                                       | 1/1.8" progressive scan CMOS                                                                       | 1/1.8" progressive scan CMOS                                                                       | 1/1.8" progressive scan CMOS                                                                       |
| Min. Illumination              | Colour: 0.002 lux @ F1.2, AGC onB/W: 0.0027 lux @ F1.4, AGC on                                     | Colour: 0.002 lux @ F1.2, AGC onB/W: 0.0027 lux @ F1.4, AGC on                                     | Colour: 0.002 lux @ F1.2, AGC onB/W: 0.0027 lux @ F1.4, AGC on                                     | Colour: 0.002 lux @ F1.2, AGC onB/W: 0.0002 lux @ F1.2, AGC on                                     |
| Lens option                    | 2.8 - 12mm @ F1.4                                                                                  | 2.8 - 12mm @ F1.4                                                                                  | 2.8 - 12mm @ F1.4                                                                                  | 11 - 40mm                                                                                          |
| Horizontal Angle of View       | 92° - 32°                                                                                          | 92° - 32°                                                                                          | 92° - 32°                                                                                          | 35.8° - 11.2°                                                                                      |
| Day/Night                      | IR cut filter with auto switch                                                                     | IR cut filter with auto switch                                                                     | IR cut filter with auto switch                                                                     | IR cut filter with auto switch                                                                     |
| IR Range (meters)              | Up to 50m                                                                                          | White Light up to 50m                                                                              | White Light up to 50m                                                                              | White Light up to 50m (11 - 40mm: 100m)                                                            |
| Video Compression              | H.264+/ H.264/ MPEG4/ MJPEG                                                                        | H.264/ MPEG4/ MJPEG                                                                                | H.264+/ H.264/ MPEG4/ MJPEG                                                                        | H.264+/ H.264/ MPEG4/ MJPEG                                                                        |
| Max. Image Resolution (pixels) | 1920 x 1080                                                                                        | 1920 x 1080                                                                                        | 1920 x 1080                                                                                        | 1920 x 1080                                                                                        |
| Frame Rate (fps)               | 50Hz: 50fps (1920 x 1080, 1280 x 960, 1280 x 720)60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) | 50Hz: 50fps (1920 x 1080, 1280 x 960, 1280 x 720)60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) | 50Hz: 50fps (1920 x 1080, 1280 x 960, 1280 x 720)60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) | 50Hz: 50fps (1920 x 1080, 1280 x 960, 1280 x 720)60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) |
| Multi-Streaming                | Triple                                                                                             | Triple                                                                                             | Triple                                                                                             | Triple                                                                                             |
| Audio Input/Output             | IN: 1 line/ micOUT: 1 line                                                                         | IN: 1 line/ micOUT: 1 line                                                                         | IN: 1 line/ micOUT: 1 line                                                                         | IN: 1 line/micOUT: 1 lineMIC: Built in                                                             |
| Alarm Input/Output             | 1/1                                                                                                | 1/1                                                                                                | 1/1                                                                                                | 1/1                                                                                                |
| Local Storage                  | MicroSD, 128 GB max.                                                                               | MicroSD, 128 GB max.                                                                               | MicroSD, 128 GB max.                                                                               | MicroSD, 128 GB max.                                                                               |
| Protection                     | IP66                                                                                               | IP67                                                                                               | IP66                                                                                               | IP66                                                                                               |
| Operating Conditions           | -30 °C - +60 °C; Humidity 95% or less (non-condensing)-H: -40 °C - +60 °C                          | -30 °C - +60 °C; Humidity 95% or less (non-condensing)                                             | -30 °C - +60 °C; Humidity 95% or less (non-condensing)                                             | -30 °C - +60 °C; Humidity 95% or less (non-condensing)                                             |
| Power Requirements (max.)      | 12V DC ± 10%, PoE (802.3at)                                                                        | 12V DC ± 10%, PoE (802.3at)                                                                        | 12V DC ± 10%, PoE (802.3at)                                                                        | 24V AC ± 10%                                                                                       |



## IP PTZ CAMERAS

Hikvision PTZ Cameras provide a wide array of benefits giving customers maximum tracking and more detail. Features like true WDR, up to 50x optical zoom, an IR range of up to 200 metres DarkFighter technology, make this series

The cameras come in three ranges, for the most flexibility: the Solution Series representing top-of-the-class in video surveillance; the Project Series, for scalable professional implementation and the Economic Series, for the price sensitive market.

## OUTDOOR PTZ



NEW



|                       |                                                                                                                                                         |                                                                                                                                                         |                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short Description     | 2MP 25× Network Speed Dome                                                                                                                              |                                                                                                                                                         |                                                                                                                                                         |
| Model                 | DS-2DE5225W-AE                                                                                                                                          | DS-2DF5232X-AEL                                                                                                                                         | DS-2DF6225X-AEL                                                                                                                                         |
| Working Temperature   | Temperature:-30°C to 65°C [-22°F to 149°F]                                                                                                              | -40°C to 65°C [-40°F to 149°F]                                                                                                                          | -40°C to 65°C [-40°F to 149°F]                                                                                                                          |
| Protection Level      | IP66 Standard, TVS 4000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                        | IP66 Standard (Outdoor), TVS 6,000V Lightning Protection, Surge Protection and Voltage Transient Protection                                             | IP67 Standard, K10 (only supported by camera without wiper), TVS 6,000V Lightning Protection, Surge Protection and Voltage Transient Protection         |
| Image Sensor          | 1/2.8" progressive scan CMOS                                                                                                                            | 1/2.8" progressive scan CMOS                                                                                                                            | 1/1.9" progressive scan CMOS                                                                                                                            |
| Min. Illumination     | Color: 0.005 Lux @(F1.6, AGC ON) B/W: 0.001 Lux @(F1.6, AGC ON)                                                                                         | Color: 0.05 Lux @(F1.6, AGC ON) B/W: 0.01 Lux @(F1.6, AGC ON)                                                                                           | Color: 0.002 Lux @(F1.5, AGC ON) B/W: 0.0002 Lux @(F1.5, AGC ON)                                                                                        |
| Max. Image Resolution |                                                                                                                                                         | 1920×1080                                                                                                                                               | 1920×1080                                                                                                                                               |
| Focal Length          | 4.8 mm to 120 mm                                                                                                                                        | 4.5-144 mm                                                                                                                                              | 5.7-142.5 mm                                                                                                                                            |
| Optical Zoom          | 25×                                                                                                                                                     | 32X                                                                                                                                                     | 25X                                                                                                                                                     |
| Angle of View         | Horizontal field of view: 57.6° to 2.5° (wide-tele) Vertical field of view: 34.4° to 1.4° (wide-tele) Diagonal field of view: 64.5° to 2.9° (wide-tele) | Horizontal field of view: 61.4° to 2.1° (wide-tele) Vertical field of view: 40.7° to 1.3° (wide-tele) Diagonal field of view: 70.0° to 2.5° (wide-tele) | Horizontal field of view: 59.8° to 2.8° (wide-tele) Vertical field of view: 33.6° to 1.6° (wide-tele) Diagonal field of view: 68.6° to 3.2° (wide-tele) |
| Aperture Range        | F1.6 to F3.8                                                                                                                                            | F1.6 to F4.4                                                                                                                                            | F1.5 to F3.4                                                                                                                                            |
| Range                 | Pan:360°,Tilt:From -15° to 90°                                                                                                                          | Pan:360° endless,Tilt:From -5° to 90°                                                                                                                   | Pan:360° endless,Tilt:From -15° to 90°                                                                                                                  |
| Speed                 | Pan:Configurable, from 0.1°/s to 250°/s, Preset Speed: 300°/s Tilt: Configurable, from 0.1°/s to 150°/s, Preset Speed: 200°/s                           | Pan:Configurable, from 0.1°/s to 300°/s, Preset Speed: 540°/s, Tilt:Configurable, from 0.1°/s to 240°/s, Preset Speed: 400°/s                           | Pan:Configurable, from 0.1°/s to 300°/s, Preset Speed: 540°/s, Tilt:Configurable, from 0.1°/s to 240°/s, Preset Speed: 400°/s                           |
| IR Distance           | -                                                                                                                                                       | -                                                                                                                                                       | -                                                                                                                                                       |
| Alarm Input           | 2                                                                                                                                                       | 7                                                                                                                                                       | 7                                                                                                                                                       |
| Alarm Output          | 1                                                                                                                                                       | 2                                                                                                                                                       | 2                                                                                                                                                       |
| Mini SD Memory Card   | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          |
| Power                 | 24 VAC 5 PoE+ [802.3at, class4], Max.:18 W                                                                                                              | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                    | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                    |
| Dimensions            | Φ 220 mm × 280 mm (Φ 8.66" × 11.02")                                                                                                                    | Φ 220 mm × 302 mm (Φ 8.66" × 11.89")                                                                                                                    | Φ 260.3 mm × 326 mm (Φ 10.25" × 12.8")                                                                                                                  |
| Weight (approx.)      | Approx. 3 kg (6.61 lb)                                                                                                                                  | Approx. 4 kg (8.82 lb)                                                                                                                                  | Approx. 6 kg (13.23 lb)                                                                                                                                 |



## IR OUTDOOR PTZ



NEW



DARKFIGHTER



DARKFIGHTER



| Short Description     | 2MP 32x Network IR Speed Dome                                                                                                                           | DarkfighterX 2MP 25x IR Network Speed Dome                                                                                                              | 2MP 25x Network IR Speed Dome                                                                                                                           | 2MP 36x Network IR Speed Dome                                                                                                                           | 2MP 50x Network IR Speed Dome                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                 | DS-2DF7232IX-AEL                                                                                                                                        | DS-2DF8225IH-AEL                                                                                                                                        | DS-2DF8225IX-AEL                                                                                                                                        | DS-2DF8236IX-AEL                                                                                                                                        | DS-2DF8250IX-AEL                                                                                                                                        |
| Working Temperature   | Outdoor: -40°C to 65°C (-40°F to 149°F)                                                                                                                 | -40°C to 65°C (-40°F to 149°F)                                                                                                                          | -40°C to 65°C (-40°F to 149°F)                                                                                                                          | -40°C to 65°C (-40°F to 149°F)                                                                                                                          | -40°C to 65°C (-40°F to 149°F)                                                                                                                          |
| Protection Level      | IP66 Standard, TVS 6,000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                       | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection         | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection         | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection         | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection         |
| Image Sensor          | 1/2.8" progressive scan CMOS                                                                                                                            | 2x 1/2.8" progressive scan CMOS                                                                                                                         | 1/1.9" progressive scan CMOS                                                                                                                            | 1/1.9" progressive scan CMOS                                                                                                                            | 1/2.8" progressive scan CMOS                                                                                                                            |
| Min. Illumination     | Color: 0.05 Lux @(F1.6, AGC ON) B/W: 0.01 Lux @(F1.6, AGC ON) 0 Lux with IR                                                                             | Color: 0.001 Lux @(F1.5, AGC ON) B/W: 0.0001 Lux @(F1.5, AGC ON) 0 Lux with IR                                                                          | Color: 0.002 Lux @(F1.5, AGC ON) B/W: 0.0002 Lux @(F1.5, AGC ON) 0 Lux with IR                                                                          | Color: 0.002 Lux @(F1.5, AGC ON) B/W: 0.0002 Lux @(F1.5, AGC ON) 0 Lux with IR                                                                          | Color: 0.05 Lux @(F1.8, AGC ON) B/W: 0.01 Lux @(F1.8, AGC ON) 0 Lux with IR                                                                             |
| Max. Image Resolution |                                                                                                                                                         | 1920×1080                                                                                                                                               | 1920×1080                                                                                                                                               | 1920×1080                                                                                                                                               | 1920×1080                                                                                                                                               |
| Focal Length          | 4.5 mm to 144 mm                                                                                                                                        | 4.8-120 mm                                                                                                                                              | 5.7-142.5 mm                                                                                                                                            | 5.7-205.2 mm                                                                                                                                            | 6.6-330 mm                                                                                                                                              |
| Optical Zoom          | 32x                                                                                                                                                     | 25X                                                                                                                                                     | 25X                                                                                                                                                     | 36X                                                                                                                                                     | 50X                                                                                                                                                     |
| Angle of View         | Horizontal field of view: 61.4° to 2.1° (wide-tele) Vertical field of view: 40.7° to 1.3° (wide-tele) Diagonal field of view: 70.0° to 2.5° (wide-tele) | Horizontal field of view: 58.2° to 3.2° (wide-tele) Vertical field of view: 32.7° to 1.8° (wide-tele) Diagonal field of view: 66.8° to 3.7° (wide-tele) | Horizontal field of view: 59.8° to 2.8° (wide-tele) Vertical field of view: 33.6° to 1.6° (wide-tele) Diagonal field of view: 68.6° to 3.2° (wide-tele) | Horizontal field of view: 59.8° to 2.0° (wide-tele) Vertical field of view: 33.6° to 1.1° (wide-tele) Diagonal field of view: 68.6° to 2.3° (wide-tele) | Horizontal field of view: 41.3° to 1.1° (wide-tele) Vertical field of view: 23.6° to 0.6° (wide-tele) Diagonal field of view: 47.4° to 1.3° (wide-tele) |
| Aperture Range        | F1.6 to F4.4                                                                                                                                            | F1.5 to F3.5                                                                                                                                            | F1.5 to F3.4                                                                                                                                            | F1.5 to F4.5                                                                                                                                            | F1.8 to F5.5                                                                                                                                            |
| Range                 | Pan:360°,Tilt:From 0° to 90°                                                                                                                            | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                  | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                  | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                  | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                  |
| Speed                 | Pan: Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/s; Tilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                          | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                             | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                             | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                             | Pan:Configurable, from 0.1°/s to 160°/s, Preset Speed: 240°/sTilt:Configurable, from 0.1°/s to 120°/s, Preset Speed: 200°/s                             |
| IR Distance           |                                                                                                                                                         | 200m                                                                                                                                                    | 200m                                                                                                                                                    | 200m                                                                                                                                                    |                                                                                                                                                         |
| Alarm Input           | 7                                                                                                                                                       | 7                                                                                                                                                       | 7                                                                                                                                                       | 7                                                                                                                                                       |                                                                                                                                                         |
| Alarm Output          | 2                                                                                                                                                       | 2                                                                                                                                                       | 2                                                                                                                                                       | 2                                                                                                                                                       | 2                                                                                                                                                       |
| Mini SD Memory Card   | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          |
| Power                 | 24 VAC (Max. 60 W) Hi-PoE (Max. 50 W)                                                                                                                   | 24 VAC (Max. 68 W) , Hi-PoE (Max. 50 W)                                                                                                                 | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                    | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                    | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                    |
| Dimensions            | Φ 245 mm × 373.94 mm (Φ 9.65" × 14.72")                                                                                                                 | Φ 266.6 mm × 437 mm (Φ 10.50" × 17.20")                                                                                                                 | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                                 | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                                 | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                                 |
| Weight (approx.)      | Approx. 6 kg (13.23 lb)                                                                                                                                 | Approx. 8 kg (17.64 lb)                                                                                                                                 | Approx. 8 kg (17.64 lb)                                                                                                                                 | Approx. 8 kg (17.64 lb)                                                                                                                                 | Approx. 8 kg (17.64 lb)                                                                                                                                 |


**DARKFIGHTER**

**DARKFIGHTER**

**DARKFIGHTER**

**DARKFIGHTER**

**DARKFIGHTER**

## OUTDOOR PTZ

| Short Description     | 4MP 25× Network IR Speed Dome                                                                                                                   | 4MP 36× Network IR Speed Dome                                                                                                                         | 8MP 25× Network IR Speed Dome                                                                                                                         | 8MP 36× Network IR Speed Dome                                                                                                                         | 2MP 25× Network Speed Dome                                                                                                                              |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                 | DS-2DF8425IX-AEL                                                                                                                                | DS-2DF8436IX-AEL                                                                                                                                      | DS-2DF8825IX-AEL                                                                                                                                      | DS-2DF8836IX-AEL                                                                                                                                      | DS-2DF6A225X-AEL                                                                                                                                        |
| Working Temperature   | -40°C to 65°C (-40°F to 149°F)                                                                                                                  | -40°C to 65°C (-40°F to 149°F)                                                                                                                        | -40°C to 65°C (-40°F to 149°F)                                                                                                                        | -40°C to 65°C (-40°F to 149°F)                                                                                                                        | Temperature: -40°C to 65°C (-40°F to 149°F)                                                                                                             |
| Protection Level      | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection       | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection       | IP66 Standard, IK10 (only supported by camera without wiper), TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection       | IP66 Standard, IK10, TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                  |
| Image Sensor          | 1/1.9" progressive scan CMOS                                                                                                                    | 1/1.9" progressive scan CMOS                                                                                                                          | 2/3" progressive scan CMOS                                                                                                                            | 2/3" progressive scan CMOS                                                                                                                            | 1/1.9" progressive scan CMOS                                                                                                                            |
| Min. Illumination     | Color: 0.005 Lux @(F1.5, AGC ON)B/W: 0.0005 Lux @(F1.5, AGC ON)0 Lux with IR                                                                    | Color: 0.005 Lux @(F1.5, AGC ON)B/W: 0.0005 Lux @(F1.5, AGC ON)0 Lux with IR                                                                          | Color: 0.005 Lux @(F1.5, AGC ON)B/W: 0.0005 Lux @(F1.5, AGC ON)0 Lux with IR                                                                          | Color: 0.005 Lux @(F1.5, AGC ON)B/W: 0.0005 Lux @(F1.5, AGC ON)0 Lux with IR                                                                          | Color: 0.002 Lux @(F1.5, AGC ON) B/W: 0.0002 Lux @(F1.5, AGC ON)                                                                                        |
| Max. Image Resolution | 2592 x 1520                                                                                                                                     | 2592 x 1520                                                                                                                                           | 3840 x 2160                                                                                                                                           | 3840 x 2160                                                                                                                                           |                                                                                                                                                         |
| Focal Length          | 5.7-142.5mm                                                                                                                                     | 5.7-205.2 mm                                                                                                                                          | 7.5-187.5 mm                                                                                                                                          | 7.5-270 mm                                                                                                                                            | 5.7 mm to 142.5 mm                                                                                                                                      |
| Optical Zoom          | 25X                                                                                                                                             | 36X                                                                                                                                                   | 25X                                                                                                                                                   | 36X                                                                                                                                                   | 25×                                                                                                                                                     |
| Angle of View         | Horizontal field of view: 51.1° to 2.5° (wide-tele)                                                                                             | Horizontal field of view: 51.1° to 1.7° (wide-tele)Vertical field of view: 31.3° to 0.7° (wide-tele)Diagonal field of view: 58.0° to 1.4° (wide-tele) | Horizontal field of view: 56.1° to 3.0° (wide-tele)Vertical field of view: 33.4° to 1.8° (wide-tele)Diagonal field of view: 62.9° to 3.0° (wide-tele) | Horizontal field of view: 56.1° to 2.0° (wide-tele)Vertical field of view: 33.4° to 1.0° (wide-tele)Diagonal field of view: 62.9° to 2.6° (wide-tele) | Horizontal field of view: 59.8° to 2.8° (wide-tele) Vertical field of view: 33.6° to 1.6° (wide-tele) Diagonal field of view: 68.6° to 3.2° (wide-tele) |
| Aperture Range        | F1.5 to F3.5                                                                                                                                    | F1.5 to F4.5                                                                                                                                          | F1.5 to F3.5                                                                                                                                          | F1.5 to F4.5                                                                                                                                          | F1.5 to F3.4                                                                                                                                            |
| Range                 | Pan:360° endless,Tilt:From -20° to 90°                                                                                                          | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                | Pan:360° endless,Tilt:From -20° to 90°                                                                                                                | Pan:360°,Tilt:From -20° to 90°                                                                                                                          |
| Speed                 | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                     | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                           | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                           | Pan:Configurable, from 0.1°/s to 210°/s, Preset Speed: 280°/sTilt:Configurable, from 0.1°/s to 150°/s, Preset Speed: 250°/s                           | Pan:Configurable, from 0.1°/s to 300°/s,Preset Speed: 450°/s Tilt: Configurable, from 0.1°/s to 240°/s,Preset Speed: 400°/s                             |
| IR Distance           | 200m                                                                                                                                            | 200m                                                                                                                                                  | 200m                                                                                                                                                  | 200m                                                                                                                                                  |                                                                                                                                                         |
| Alarm Input           | 7                                                                                                                                               | 7                                                                                                                                                     | 7                                                                                                                                                     | 7                                                                                                                                                     | 7                                                                                                                                                       |
| Alarm Output          | 2                                                                                                                                               | 2                                                                                                                                                     | 2                                                                                                                                                     | 2                                                                                                                                                     | 2                                                                                                                                                       |
| Mini SD Memory Card   | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                  | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                        | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                        | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                        | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIPS), ANR                                                          |
| Power                 | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                            | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                  | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                  | 24 VAC (Max. 60 W)Hi-PoE (Max. 50 W)                                                                                                                  | 24 VAC (Max. 60 W) , Hi-PoE (Max. 50 W)                                                                                                                 |
| Dimensions            | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                         | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                               | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                               | Φ 266.6 mm × 410 mm (Φ 10.50" × 16.14")                                                                                                               | Φ 231.1 mm × 355.6 mm (Φ 9.10" × 14")                                                                                                                   |
| Weight (approx.)      | Approx. 8 kg (17.64 lb)                                                                                                                         | Approx. 8 kg (17.64 lb)                                                                                                                               | Approx. 8 kg (17.64 lb)                                                                                                                               | Approx. 8 kg (17.64 lb)                                                                                                                               | Approx. 6 kg (13.23 lb)                                                                                                                                 |



NEW

|                       |                                                                                                                                                         |                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short Description     | 2MP 36x Network Speed Dome                                                                                                                              | 2MP 36x IR Network Positioning System                                                                                                                   |
| Model                 | DS-2DF6A236X-AEL                                                                                                                                        | DS-2DY7236IW-A                                                                                                                                          |
| Working Temperature   | Temperature: -40°C to 65°C (-40°F to 149°F)                                                                                                             | Temperature: Outdoor: -40°C to 70°C (-40°F to 158°F) Humidity: ≤ 90%                                                                                    |
| Protection Level      | IP66 Standard, IK10, TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                  | IP66 Standard; TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection                                                        |
| Image Sensor          | 1/1.9" progressive scan CMOS                                                                                                                            | 1/1.8" progressive scan CMOS                                                                                                                            |
| Min. Illumination     | Color: 0.002 Lux @(F1.5, AGC ON) B/W: 0.0002 Lux @(F1.5, AGC ON)                                                                                        | Color: 0.05 Lux @(F1.6, AGC ON) B/W: 0.01 Lux @(F1.6, AGC ON) 0 Lux with IR                                                                             |
| Max. Image Resolution |                                                                                                                                                         | 700TVL                                                                                                                                                  |
| Focal Length          | 5.7 mm to 205.2 mm                                                                                                                                      | 5.7 mm to 205 mm                                                                                                                                        |
| Optical Zoom          | 36x                                                                                                                                                     | 36x                                                                                                                                                     |
| Angle of View         | Horizontal field of view: 59.8° to 2.8° (wide-tele) Vertical field of view: 33.6° to 1.6° (wide-tele) Diagonal field of view: 68.6° to 3.2° (wide-tele) | Horizontal field of view: 59.8° to 2.0° (wide-tele) Vertical field of view: 33.6° to 1.1° (wide-tele) Diagonal field of view: 68.6° to 2.3° (wide-tele) |
| Aperture Range        | F1.8 to F5.5                                                                                                                                            | F1.5 to F4.5                                                                                                                                            |
| Range                 | Pan: 360°, Tilt: From -20° to 90°                                                                                                                       | Pan: 360° endless, Tilt: From -15° to 90°                                                                                                               |
| Speed                 | Pan: Configurable, from 0.1°/s to 300°/s, Preset Speed: 450°/s Tilt: Configurable, from 0.1°/s to 240°/s, Preset Speed: 400°/s                          | Pan: Configurable, from 0.1°/s to 150°/s, Preset speed: 150°/s Tilt: Configurable, from 0.1°/s to 100°/s, Preset Speed: 100°/s                          |
| IR Distance           |                                                                                                                                                         | -                                                                                                                                                       |
| Alarm Input           | 7                                                                                                                                                       | 2                                                                                                                                                       |
| Alarm Output          | 2                                                                                                                                                       | 1                                                                                                                                                       |
| Mini SD Memory Card   | Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/CIFS), ANR                                                           |                                                                                                                                                         |
| Power                 | 24 VAC (Max. 60 W), Hi-PoE (Max. 50 W)                                                                                                                  | 24 VAC (Max. 55 W)                                                                                                                                      |
| Dimensions            | Φ 231.1 mm × 355.6 mm (Φ 9.10" × 14")                                                                                                                   | Φ 181 mm × 396 mm × 377.5 mm Φ 7.13" × 15.59" × 14.86"                                                                                                  |
| Weight (approx.)      | Approx. 6 kg (13.23 lb)                                                                                                                                 | Approx. 7.6 kg (16.76 lb)                                                                                                                               |

**HIKVISION**



**HIKVISION PANO-VU SERIES**  
**NETWORK CAMERA**  
HUGE PANORAMAS  
INCREDIBLE ZOOM

**PanoVu**

[www.hikvision.com](http://www.hikvision.com)



## PANOVU CAMERAS

PanoVu Panoramic camera views have incredible detail in a single camera.

When designing surveillance applications, more and greater requirements have become necessary for monitoring large areas such as public plazas, arenas, airports, busy traffic intersections and the like. In very large settings, security personnel need to see more with just one camera, not just a panoramic image, but zoomed-in, detailed views as well.

|                               |                                                                                         |                                                                                                  |                                                                                                   |                                                                                                  |
|-------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|                               | 24MP                                                                                    | 8MP                                                                                              | 16MP                                                                                              |                                                                                                  |
|                               |        |                 |                |               |
| Short Description             | 24 MP PanoVu Camera                                                                     | PanoVu Series 180° Panoramic + PTZ Camera                                                        | PanoVu series 360° Panoramic Camera                                                               | PanoVu Series 360° Panoramic + PTZ Camera                                                        |
| Model                         | DS-2CD6A64F-IHS/NFC                                                                     | DS-2DP0818ZIX-D/236                                                                              | DS-2DP1636-D                                                                                      | DS-2DP1636ZIX-D/236                                                                              |
| Image Sensor (Panoramic)      | 1/1.8" Progressive Scan CMOS                                                            | Four 1/1.8" Progressive Scan CMOS                                                                | 1/1.9" Progressive Scan CMOS                                                                      | Eight 1/1.8" Progressive Scan CMOS                                                               |
| Min. Illumination (Panoramic) | Color: 0.01 Lux @ (F1.2, AGC ON) B/W: 0.001Lux @ (F1.2, AGC ON)                         | Color: 0.005 Lux@(F2.0, AGC ON), B/W: 0.0005 Lux@(F2.0, AGC ON)                                  | Color: 0.004Lux @ (F1.8, AGC ON), B/W: 0.0004Lux @ (F1.8, AGC ON)                                 | Color: 0.005 Lux@(F2.0, AGC ON), B/W: 0.0005 Lux@(F2.0, AGC ON)                                  |
| Lens (Panoramic)              | 5.5 mm/F1.8                                                                             | 5.0mm/ F2.0                                                                                      | 4.0mm/ F1.8                                                                                       | 5.0mm/ F2.0                                                                                      |
| Field of View (Panoramic)     | Horizontal field of view: 180° Vertical field of view: 80° Diagonal field of view: 196° | Horizontal : 180°, Vertical: 80°                                                                 | Horizontal angle of view: 360°, Vertical angle of view: 180°                                      | Horizontal : 360°, Vertical: 80°                                                                 |
| Video Compression (Panoramic) | Main stream: H.265/H.264 Sub stream: H.265/H.264                                        | Main Stream: H.265/ H.264 Sub-Stream: H.265/ H.264/ MJPEG Third Stream: H.265/ H.264/ MJPEG      | H.264(Baseline, Main, High Profile)/MJPEG                                                         | Main Stream: H.265/ H.264 Sub-Stream: H.265/ H.264/ MJPEG Third Stream: H.265/ H.264/ MJPEG      |
| Image Sensor (PTZ)            |                                                                                         | 1/1.8" Progressive Scan CMOS                                                                     |                                                                                                   | 1/1.8" Progressive Scan CMOS                                                                     |
| Min. Illumination (PTZ)       |                                                                                         | Color: 0.002 Lux@(F1.5, AGC ON), B/W: 0.0002 Lux@(F1.5, AGC ON), 0 Lux with IR                   |                                                                                                   | Color: 0.002 Lux@(F1.5, AGC ON), B/W: 0.0002 Lux@(F1.5, AGC ON), 0 Lux with IR                   |
| IR (PTZ)                      |                                                                                         | IR distance: 200m; IR brightness and angle are adjustable.                                       |                                                                                                   | IR distance: 200m; IR brightness and angle are adjustable.                                       |
| Focal Length (PTZ)            |                                                                                         | 5.6-208mm, 36×                                                                                   |                                                                                                   | 5.6-208mm, 36×                                                                                   |
| Horizontal FOV (PTZ)          |                                                                                         | 62.5° to 1.9° (Wide-Tele)                                                                        |                                                                                                   | 62.5° to 1.9° (Wide-Tele)                                                                        |
| Pan and Tilt Range (PTZ)      |                                                                                         | Pan: 360°, Tilt: -15° to 90°                                                                     |                                                                                                   | Pan: 360°, Tilt: -15° to 90°                                                                     |
| Patrol (PTZ)                  |                                                                                         | 8 patrols, up to 32 presets per patrol                                                           |                                                                                                   | 8 patrols, up to 32 presets per patrol                                                           |
| Video Compression (PTZ)       |                                                                                         | Main Stream: H.265/ H.264 Sub-Stream: H.265/ H.264/ MJPEG Third Stream: H.265/ H.264/ MJPEG      |                                                                                                   | Main Stream: H.265/H.264 Sub-Stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPEG           |
| Alarm Input/ Output           | 2/2                                                                                     | 7/2                                                                                              | 7/2                                                                                               | 7/2                                                                                              |
| Audio Input/ Output           | 1/1                                                                                     | 1/1                                                                                              | 1/1                                                                                               | 1/1                                                                                              |
|                               | Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR       | Built-in memory card slot, support Micro SD/SDHC/SDXC (up to 128GB)                              | Built-in Micro SD/SDHC /SDXC card slot, up to 128GB, manual/alarm recording                       | Built-in memory card slot, support Micro SD/SDHC/SDXC (up to 128GB)                              |
| Power Supply                  | 36 VDC ± 20%, terminal block                                                            | 36 VDC                                                                                           | 36 VDC                                                                                            | 36 VDC                                                                                           |
|                               | 36 VDC ± 20%: max. 60W/1.6A                                                             | 105 W Max.                                                                                       | 110WMax (Heater: 44W)                                                                             | 130 W Max.                                                                                       |
|                               | IP66                                                                                    | IP66 Standard, TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection | IP66 standard, TVS 6,000V lightning protection, surge protection and voltage transient protection | IP66 Standard, TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection |



|                               |                                                                                                                                                                               |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | 2MP                                                                                                                                                                           |
|                               | <div></div> |
| Short Description             | PanoVu PT Series 2MP + 2MP Target Capture Camera                                                                                                                              |
| Model                         | iDS-2PT9122IX-DE/S                                                                                                                                                            |
| Image Sensor (Panoramic)      | 1/2.7" Progressive Scan CMOS                                                                                                                                                  |
| Min. Illumination (Panoramic) | Color: 0.002 Lux@(F1.0, AGC ON), B/W: 0.0005 Lux@(F1.0, AGC ON)                                                                                                               |
| Lens (Panoramic)              | 4.0mm/F1.0                                                                                                                                                                    |
| Field of View (Panoramic)     | Horizontal FOV 92°                                                                                                                                                            |
| Video Compression (Panoramic) | H.265+/H.265/H.264+/H.264/MJPEG                                                                                                                                               |
| Image Sensor (PTZ)            | 1/2.7" Progressive Scan CMOS                                                                                                                                                  |
| Min. Illumination (PTZ)       | Color: 0.0035 Lux@(F1.6, AGC ON), 0 Lux with IR                                                                                                                               |
| IR (PTZ)                      | Up to 100 m                                                                                                                                                                   |
| Focal Length (PTZ)            | 5-50 mm, 10×                                                                                                                                                                  |
| Horizontal FOV (PTZ)          | 61.3° to 6.26° (Wide-Tele)                                                                                                                                                    |
| Pan and Tilt Range (PTZ)      | Pan: 210°, Tilt: -22° to 22°                                                                                                                                                  |
| Patrol (PTZ)                  | 8 patrols, up to 32 presets per patrol                                                                                                                                        |
| Video Compression (PTZ)       | H.265+/H.265/H.264+/H.264/MJPEG                                                                                                                                               |
| Alarm Input/ Output           | 1/1                                                                                                                                                                           |
| Audio Input/ Output           | 1/1                                                                                                                                                                           |
|                               | Built-in memory card slot, support Micro SD/SDHC/SDXC (up to 256 GB)                                                                                                          |
| Power Supply                  | 12 VDC & Hi-PoE                                                                                                                                                               |
|                               | 45 W Max. (IR 6 W Max.)                                                                                                                                                       |
|                               | IP66 Standard, TVS 6000 V Lightning Protection, Surge Protection and Voltage Transient Protection                                                                             |



# HIKVISION THERMAL CAMERAS SEEING THE UNSEEN

All objects with a temperature above absolute zero emit thermal radiation, even at low levels. This kind of radiation, invisible to the human eye, can be detected by thermal imaging sensors. Thermal cameras can produce images in the visual spectrum by detecting temperature differences between an object and its surroundings. The larger the difference, the bigger the contrast variety, making details visible. Compared to visible-light cameras, thermal cameras can be used for applications in more challenging environments.





## THERMAL NETWORK CAMERAS

Combining Hikvision developed thermal imaging technology with our extensive experience in the video surveillance field, we are equipped to provide a full range of thermal products to meet our customers' various requirements.

The single-lens bullet cameras provide a low total cost of ownership, flexibility and thermal imaging with powerful Smart Functions. This thermal camera offers the same security features any other camera like line crossing and intrusion detection for example, but it is immune to the meteorological conditions. It detects the temperature difference and acts on it!

BULLET THERMAL



|                                 |                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------|
| Short Description               | Thermal Network Bullet Camera                                                                            |
| Model                           | DS-2TD2136-10/15/25/35                                                                                   |
| Image sensor                    | Vanadium Oxide Uncooled Focal Plane Arrays                                                               |
| Max. Resolution                 | 384X288                                                                                                  |
| Response waveband               | 8μm to 14μm                                                                                              |
| NETD                            | < 50mk[@25°C,F#=1.0]                                                                                     |
| Lens (focal length)             | 10 mm                                                                                                    |
| MRAD                            | 1.70 mrad                                                                                                |
| Field of View                   | 36° × 27°                                                                                                |
| Min. Focusing Distance          | 1m                                                                                                       |
| F number                        | 1                                                                                                        |
| Video compression               | H.264/MJPEG, H.264+ encoding with Baseline/Main/High Profile                                             |
| Simultaneous live view          | Up to 20                                                                                                 |
| Alarm input                     | 2-ch inputs (0-5vDC)                                                                                     |
| Alarm output                    | 2-ch relay outputs, alarm response actions configurable                                                  |
| Ethernet                        | 1 RJ45 10M/100M Self-adaptive Ethernet interface                                                         |
| SD memory card                  | Built-in Micro SD card slot, support Micro SD/SDHC/SDXC card (up to 64G), support manual/alarm recording |
| Power                           | POE+ (802.3at), 24VAC, 12VDC/3A, 8W (20W with De-icing Heater On)                                        |
| Working temperature<br>Humidity | -40 °C to 65 °C (-40 °F to 149 °F), 90% or less                                                          |
| Protection level                | IP66, TVS 6000V Lightning protection, surge protection, voltage transient protection                     |
| Dimensions                      | 314mm×104mm×292.7mm [12.36″×4.09″×11.52″]                                                                |
| Weight                          | 2kg (4.41lb)                                                                                             |

## IP NETWORK VIDEO RECORDERS (NVRs)

Hikvision offers a wide range of NVRs, from the 8-channel Economic Series, through the 16/32 channels Project Series and onto the high-end Solution Series. They offer IP camera monitoring, recording and playback, whatever the requirement.

### GENERAL NVR PRODUCT LINE



## 4U CHASSIS



NEW

## 3U CHASSIS



NEW



NEW

| Short Description                         | DS-96000NI-I24 SERIES NVR                                                                                                                                                                                                                            | DS-96000NI-I16 SERIES NVR                                                                                                                                                                                                                            | DS-9600NI-I16 SERIES NVR                                                                                                                                    | iDS-96000NXI-I16 DeepinMind Series NVR                                                                                                                                                       |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                                     | DS-96000NI-I24                                                                                                                                                                                                                                       | DS-96000NI-I16                                                                                                                                                                                                                                       | DS-9600NI-I16                                                                                                                                               | iDS-96000NXI-I16                                                                                                                                                                             |
| IP video input                            | 256-ch                                                                                                                                                                                                                                               | 4-ch                                                                                                                                                                                                                                                 | 64-ch                                                                                                                                                       | 4-ch                                                                                                                                                                                         |
| Incoming bandwidth                        | 768 Mbps                                                                                                                                                                                                                                             | 40 Mbps                                                                                                                                                                                                                                              | 320 Mbps or 200 Mbps (when RAID is enabled)                                                                                                                 | 40 Mbps                                                                                                                                                                                      |
| Outgoing bandwidth                        | 768 Mbps                                                                                                                                                                                                                                             | 512 Mbps                                                                                                                                                                                                                                             | 256 Mbps, or 200 Mbps (when RAID is enabled)                                                                                                                | 512 Mbps                                                                                                                                                                                     |
| Recording resolution                      | 12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                                                                                                      | 12 MP/8 MP/7 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                                                                                                      | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                  | 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                                                   |
| HDMI output                               | Two independent HDMI outputs of 4K resolution. Resolution: 4K (4096 × 2160), 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1080p (1920 × 1080)/60Hz, UXGA (1600 × 1200)/60Hz, SXGA (1280 × 1024)/60Hz, 720p (1280 × 720)/60Hz, XGA (1024 × 768)/60Hz | Two independent HDMI outputs of 4K resolution. Resolution: 4K (4096 × 2160), 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1080p (1920 × 1080)/60Hz, UXGA (1600 × 1200)/60Hz, SXGA (1280 × 1024)/60Hz, 720p (1280 × 720)/60Hz, XGA (1024 × 768)/60Hz | 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | 2-ch independent HDMI interface, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| VGA output                                | 1-ch. Resolution: 1080p (1920 × 1080)/60Hz, UXGA (1600 × 1200)/60Hz, SXGA (1280 × 1024)/60Hz, 720p (1280 × 720)/60Hz, XGA (1024 × 768)/60Hz                                                                                                          | 1-ch. Resolution: 1080p (1920 × 1080)/60Hz, UXGA (1600 × 1200)/60Hz, SXGA (1280 × 1024)/60Hz, 720p (1280 × 720)/60Hz, XGA (1024 × 768)/60Hz                                                                                                          | 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz                                                                 | 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz                                                                                                                   |
| Audio output                              | 1-ch. RCA (2.0 Vp-p, 1 KΩ)                                                                                                                                                                                                                           | 1-ch. RCA (2.0 Vp-p, 1 KΩ)                                                                                                                                                                                                                           | 2-ch, RCA (Linear, 1 KΩ)                                                                                                                                    | 1-ch, RCA (2.0 Vp-p, 1 KΩ)                                                                                                                                                                   |
| Decoding format                           | H.265, H.265+, H.264, H.264+, MPEG4, MJPEG (for Hikvision IP camera only)                                                                                                                                                                            | H.265, H.265+, H.264, H.264+, MPEG4, MJPEG (for Hikvision IP camera only)                                                                                                                                                                            | H.265/H.265+/H.264/H.264+/MPEG4                                                                                                                             | H.265+/H.265/H.264+/H.264/SVAC/MJPEG/MPEG4                                                                                                                                                   |
| Capability                                | 20-ch@1080p                                                                                                                                                                                                                                          | 20-ch@1080p                                                                                                                                                                                                                                          | 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 16-ch @ 1080p (30fps)                                                                     | 5-ch@8 MP/10-ch@4 MP/20-ch@1080p/40-ch@720p                                                                                                                                                  |
| SATA                                      | 24 SATA interfaces supporting hot-plug                                                                                                                                                                                                               | 16 SATA interfaces supporting hot-plug                                                                                                                                                                                                               | 16 SATA interfaces                                                                                                                                          | 16 SATA interfaces                                                                                                                                                                           |
| Capacity                                  | Up to 10 TB for each HDD                                                                                                                                                                                                                             | Up to 10 TB for each HDD                                                                                                                                                                                                                             | Up to 6TB capacity for each HDD                                                                                                                             | Up to 8 TB capacity for each HDD                                                                                                                                                             |
| Network interface                         | 4, RJ45 10M/100M/1000M self-adaptive Ethernet interface                                                                                                                                                                                              | 4, RJ45 10M/100M/1000M self-adaptive Ethernet interface                                                                                                                                                                                              | 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface                                                                                                  | 4, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface                                                                                                                                   |
| USB interface                             | Front Panel: 2 × USB 2.0; Rear Panel: 2 × USB 3.0                                                                                                                                                                                                    | Front Panel: 2 × USB 2.0; Rear Panel: 2 × USB 3.0                                                                                                                                                                                                    | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0                                                                                                           | Front panel: 2 × USB 2.0; Rear panel: 2 × USB 3.0                                                                                                                                            |
| Alarm in/out                              | 16/8                                                                                                                                                                                                                                                 | 16/8                                                                                                                                                                                                                                                 | 16/8                                                                                                                                                        | 16/8                                                                                                                                                                                         |
| Power supply                              | 100 to 240 VAC, ≤ 550W                                                                                                                                                                                                                               | 100 to 240 VAC, ≤ 550W                                                                                                                                                                                                                               | 100 to 240 VAC, 50 to 60 Hz                                                                                                                                 | 100 to 240 VAC, redundant power supplies, ≤ 550W                                                                                                                                             |
| Consumption(without hard disk or DVD-R/W) | ≤ 140W                                                                                                                                                                                                                                               | ≤ 140W                                                                                                                                                                                                                                               | ≤ 45 W                                                                                                                                                      | ≤ 140 W                                                                                                                                                                                      |
| Working temperature                       | 0 °C to + 50 °C (32 °F to 122 °F)                                                                                                                                                                                                                    | 0 °C to + 50 °C (32 °F to 122 °F)                                                                                                                                                                                                                    | -10 to +55° C (+14 to +131° F)                                                                                                                              | 0 °C to + 50 °C (32 °F to 122 °F)                                                                                                                                                            |
| Working humidity                          | 10% to 90%                                                                                                                                                                                                                                           | 10% to 90%                                                                                                                                                                                                                                           | 10 to 90 %                                                                                                                                                  | 10% to 90 % RH (no freezing and no condensation)                                                                                                                                             |
| Dimensions(W × D × H)                     | 447 × 528 × 172mm (17.6 × 20.8 × 6.8 inch)                                                                                                                                                                                                           | 442 × 494 × 146 mm (17.4 × 19.4 × 5.7 inch)                                                                                                                                                                                                          | 445 × 496 × 146 mm (17.5" × 19.5" × 5.7")                                                                                                                   | 442 × 494 × 146 mm (17.4 × 19.4 × 5.7 inch)                                                                                                                                                  |



|                                           |                                                                                                                                                                                                                                   |                                                                                    |                                                                                                                                                                                                                                        |                                                                                     |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                           | 2U CHASSIS                                                                                                                                                                                                                        |                                                                                    | 1.5U CHASSIS                                                                                                                                                                                                                           |                                                                                     |
|                                           |                                                                                                                                                  |  |                                                                                                                                                     |  |
|                                           | <b>NEW</b>                                                                                                                                                                                                                        |                                                                                    |                                                                                                                                                                                                                                        |                                                                                     |
| Short Description                         | <b>DS-9600NI-I8 SERIES NVR</b>                                                                                                                                                                                                    |                                                                                    | <b>iDS-9632NXI-I8/S DeepinMind Series NVR</b>                                                                                                                                                                                          |                                                                                     |
| Model                                     | DS-9600NI-I8                                                                                                                                                                                                                      |                                                                                    | iDS-9632NXI-I8/S                                                                                                                                                                                                                       |                                                                                     |
| IP video input                            | 32-ch                                                                                                                                                                                                                             |                                                                                    | 32-ch                                                                                                                                                                                                                                  |                                                                                     |
| Incoming bandwidth                        | 320 Mbps or 200 Mbps (when RAID is enabled)                                                                                                                                                                                       |                                                                                    | 160 Mbps                                                                                                                                                                                                                               |                                                                                     |
| Outgoing bandwidth                        | 256 Mbps or 200 Mbps (when RAID is enabled)                                                                                                                                                                                       |                                                                                    | 256 Mbps                                                                                                                                                                                                                               |                                                                                     |
| Recording resolution                      | 12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                                                                                              |                                                                                    | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF                                                                                                                                                                   |                                                                                     |
| HDMI output                               | 2 HDMI, resolution: HDMI1:3840×2160@60Hz, 3840×2160@30Hz, 2560×1440@60Hz, 1920×1080P@60Hz, 1600×1200@60 Hz, 1280×1024@60 Hz, 1280×720@60 Hz, 1024×768@60Hz HDMI2: 1920×1080P@60Hz, 1280×1024@60 Hz, 1280×720@60 Hz, 1024×768@60Hz |                                                                                    | 4K [3840 × 2160]/60Hz, 4K [3840 × 2160]/30Hz, 2K [2560 × 1440]/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI2:1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |                                                                                     |
| VGA output                                | 2 VGA, resolution: VGA1: 2560×1440@60Hz, 1920×1080P@60Hz, 1600×1200@60 Hz, 1280×1024@60 Hz, 1280×720@60 Hz, 1024×768@60Hz VGA2: 1920×1080P@60Hz, 1280×1024@60 Hz, 1280×720@60 Hz, 1024×768@60Hz                                   |                                                                                    | 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz                                                                                                                                                                  |                                                                                     |
| Audio output                              | 2-ch, RCA [2.0 Vp-p, 1kohm]                                                                                                                                                                                                       |                                                                                    | 1-ch, RCA [Linear, 1 KΩ]                                                                                                                                                                                                               |                                                                                     |
| Decoding format                           | H.265/H.265+/H.264/H.264+/MPEG4                                                                                                                                                                                                   |                                                                                    | H.265/H.265+/H.264/H.264+/MPEG4                                                                                                                                                                                                        |                                                                                     |
| Capability                                | 4-ch @ 4K or 16-ch @ 1080p                                                                                                                                                                                                        |                                                                                    | 4-ch @ 4K, or 16-ch @ 1080p                                                                                                                                                                                                            |                                                                                     |
| SATA                                      | 8 SATA interfaces for 8 HDDs                                                                                                                                                                                                      |                                                                                    | 4 SATA interfaces for 4 HDDs                                                                                                                                                                                                           |                                                                                     |
| Capacity                                  | Up to 6TB capacity for each HDD                                                                                                                                                                                                   |                                                                                    | Up to 6TB capacity for each HDD                                                                                                                                                                                                        |                                                                                     |
| Network interface                         | 2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface                                                                                                                                                                        |                                                                                    | 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces                                                                                                                                                                             |                                                                                     |
| USB interface                             | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0                                                                                                                                                                                 |                                                                                    | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0                                                                                                                                                                                      |                                                                                     |
| Alarm in/out                              | 16/4                                                                                                                                                                                                                              |                                                                                    | 16/4                                                                                                                                                                                                                                   |                                                                                     |
| Power supply                              | 100 to 240 VAC, 50 to 60 Hz                                                                                                                                                                                                       |                                                                                    | 100 to 240 VAC                                                                                                                                                                                                                         |                                                                                     |
| Consumption(without hard disk or DVD-R/W) | ≤ 30 W                                                                                                                                                                                                                            |                                                                                    | ≤20 W                                                                                                                                                                                                                                  |                                                                                     |
| Working temperature                       | -10 °C ~ +55 °C (14 °F ~ 131 °F)                                                                                                                                                                                                  |                                                                                    | -10 to +55° C (+14 to +131° F)                                                                                                                                                                                                         |                                                                                     |
| Working humidity                          | 10% ~ 90%                                                                                                                                                                                                                         |                                                                                    | 10 to 90 %                                                                                                                                                                                                                             |                                                                                     |
| Dimensions(W × D × H)                     | 445 × 470 × 90 mm (17.5"×18.5"×3.5")                                                                                                                                                                                              |                                                                                    | 445 × 400 × 71 mm ( 17.5"× 15.7" × 2.8")                                                                                                                                                                                               |                                                                                     |



NEW

Short Description **iDS-7700NXI-I/S DeepinMind SERIES NVR**

Model iDS-7700NXI-I/P/S

IP video input

Incoming bandwidth

Outgoing bandwidth 200 Mbps

Recording resolution 12 MP/8 MP/6 MP/5 MP/4 MP/3MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF

HDMI output

VGA output

Audio output 1-ch, RCA (Linear, 1 KΩ)

Decoding format H.265/H.265+/H.264/H.264+/MPEG4

Capability 2-ch @ 12 MP (20fps) / 4-ch @ 8 MP (25fps) / 8-ch @ 4MP (30fps) / 12-ch @ 1080p (30fps)

SATA 4 SATA interfaces for 4HDDs

Capacity Up to 6TB capacity for each HDD

Network interface 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface

USB interface Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0

Alarm in/out 16/8

Power supply 100 to 240 VAC, ≤ 300 W

Consumption(without hard disk or DVD-R/W) ≤ 30 W

Working temperature -10 to +55° C (+14 to +131° F)

Working humidity 10 to 90 %

Dimensions(W × D × H) 445 × 400 × 71 mm ( 17.5" × 15.7" × 2.8")



## MONITORS

Hikvision also offers a selection of monitors to complement your security solution. Whatever size you need - from 19" to 84", our LED displays give you eyes on your security solution.

## SWITCHES

Hikvision also offers a range of professional switches to maximise the effect of your solution by extending your reach and increasing your data capacity.

## DE-/ENCODERS

There are a number of Decoder and Encoder products to choose from to complement your solution.

## KEYBOARDS & ACCESSORIES

To further enhance any surveillance system, Hikvision provides a comprehensive set of keyboards & accessories; video balun, coaxial transmission, PoE video repeaters, microphone, HDD and brackets.

18.5"

**18.5" Monitor**

21.5"

**21.5" LED Monitor****21.5" LED Monitor**

23.6"

**23.6" LED Monitor**

NEW

Short Description

|                                 |                                           |                                       |                                       |                                        |
|---------------------------------|-------------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|
| Model                           | DS-D5019QE-B                              | DS-D5022FC                            | DS-D5022QE-B                          | DS-D5024FC                             |
| Display Type                    | LED-Backlit TFT LCD                       | LED-Backlit                           | LED-Backlit                           | LED-Backlit                            |
| Resolution                      | 1366 x 768                                | 1920 ×1080                            | 1920 ×1080                            | 1920 ×1080                             |
| Contrast                        | 600:1                                     | 1000:1                                | 1000:1                                | 1000:1(Typical) DCR 30,000,000:1       |
| Response Time                   | 5ms                                       | 5ms                                   | 5ms                                   | 5ms                                    |
| VESA                            | 75 mm x 75 mm                             | 100mm × 100mm                         | 100mm × 100mm                         | 100mm × 100mm                          |
| Power Supply                    | 100 to 240 VAC, 50/60Hz                   | DC 12V/3.0A                           | 100 ~ 240V AC                         | AC 100~240V                            |
| Power Consumption               | < 25 W(on) < 0.5 W(Standby)               | < 30W(on) < 0.5W(Standby)             | < 30W(on) < 0.4W(Standby)             | < 30W(on) < 0.5W(Standby)              |
| Operation Temperature           | 0°C ~ 40 °C                               | 0°C ~ 40 °C                           | 0°C ~ 40 °C                           | 0°C ~ 40 °C                            |
| Dimension                       | 445.58 mm x 274.99 mm x 44.6mm            | 511.4mm x 313.0mm x 45.4mm            | 511mm×377mm×170mm                     | 561x339x218.5 [mm] 22.1x13.3x8.6[inch] |
| Frame Width/Height<br>(T/B/L/R) |                                           |                                       |                                       |                                        |
| Weight                          | 3.5 Kg(Gross weight) , 2.8 Kg(Net weight) | 4.6Kg(Gross weight) , 3.2(Net weight) | 4.5Kg(Gross weight) , 3.3(Net weight) | 6.0Kg(Gross weight) , 5.1(Net weight)  |

|                              |                                                                                   |                                                                                   |                                                                                     |                                                                                     |     |
|------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----|
|                              | 32"                                                                               |                                                                                   | 32"                                                                                 |                                                                                     | 49" |
|                              |  |  |  |  |     |
| Short Description            | 32" LED Monitor                                                                   | 32" LED Monitor                                                                   | 32" Monitor                                                                         | 49" Monitor                                                                         |     |
| Model                        | DS-D5032FC                                                                        | DS-D5032FC                                                                        | DS-D5032FL                                                                          | DS-D5049FL                                                                          |     |
| Display Type                 | TFT-LED Backlight                                                                 | TFT-LED Backlight                                                                 | LED-Backlit TFT LCD                                                                 | LED-Backlit TFT LCD                                                                 |     |
| Resolution                   | 1920 ×1080                                                                        | 1920 ×1080                                                                        | 1920 × 1080                                                                         | 1920 × 1080                                                                         |     |
| Contrast                     | 3000:1                                                                            | 3000:1                                                                            | 3000:1                                                                              | 1100 : 1                                                                            |     |
| Response Time                | 6.5ms                                                                             | 6.5ms                                                                             | 6.5 ms                                                                              | 12 ms                                                                               |     |
| VESA                         | 200mm x 100mm                                                                     | 200mm x 100mm                                                                     | 200 mm x 200 mm                                                                     |                                                                                     |     |
| Power Supply                 | 100 ~ 240V AC, 50/60Hz                                                            | 100 ~ 240V AC, 50/60Hz                                                            | 100 to 240 VAC, 50/60Hz                                                             | 100 to 240 VAC, 50/60Hz                                                             |     |
| Power Consumption            | ≤ 55W                                                                             | ≤ 55W                                                                             | < 60W(on) < 1W(Standby)                                                             | < 60W(on) < 1W(Standby)                                                             |     |
| Operation Temperature        | 5°C ~ 40°C                                                                        | 5°C ~ 40°C                                                                        | 0°C ~ 40 °C                                                                         | 0°C ~ 40 °C                                                                         |     |
| Dimension                    | 743.95mm × 443.40mm × 58.70mm                                                     | 743.95mm × 443.40mm × 58.70mm                                                     | 737.4 mm × 452.5 mm × 70.65 mm (29.03" x 17.81" x 2.78")                            | 1141.18 mm × 677.5 mm × 69 mm                                                       |     |
| Frame Width/Height (T/B/L/R) |                                                                                   |                                                                                   |                                                                                     |                                                                                     |     |
| Weight                       | 10.6Kg(Gross weight) , 8Kg(Net weight)                                            | 10.6Kg(Gross weight) , 8Kg(Net weight)                                            | 19 Kg(Gross weight) ,12 Kg (Net weight)                                             | 32 Kg(Gross weight) , 24.65 Kg(Net weight)                                          |     |

55"



|                                 |                                                               |
|---------------------------------|---------------------------------------------------------------|
| Short Description               | 55" Ultra HD Display                                          |
| Model                           | DS-D5055UL-B                                                  |
| Display Type                    | LCD Backlight                                                 |
| Resolution                      | 3840 × 2160                                                   |
| Contrast                        | 1100:1                                                        |
| Response Time                   | 8 ms                                                          |
| VESA                            |                                                               |
| Power Supply                    | 100 to 240 VAC, 50/60Hz                                       |
| Power Consumption               | ≤ 100 W                                                       |
| Operation Temperature           | 0 to 40 ° C (0 to 104 ° F)                                    |
| Dimension                       |                                                               |
| Frame Width/Height<br>(T/B/L/R) |                                                               |
| Weight                          | ≤ 41 kg (90.4 lb)[Gross weight],≤ 35 kg (77.2 lb)[Net weight] |

|                      |                                                                                   |                                                                                   |     |                                                                                     |                                                                                     |
|----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                      | 5 PORTS                                                                           | 8 PORTS                                                                           | NEW | 9 PORTS                                                                             | NEW                                                                                 |
|                      |  |  |     |  |  |
| Short Description    | 4-ports 100Mbps Unmanaged PoE Switch                                              | DS-3E Series Unmanaged PoE Switch                                                 |     | 8-ports 100Mbps Unmanaged PoE Switch                                                | DS-3E Series Unmanaged PoE Switch                                                   |
| Model                | DS-3E0105P-E                                                                      | DS-3E0108P-E                                                                      |     | DS-3E0109P-E                                                                        | DS-3E0109P-E/M                                                                      |
| Network Ports        | 5                                                                                 | 8                                                                                 |     | 9                                                                                   | 9                                                                                   |
| Switching Capacity   | 1Gbps                                                                             | 1.6 Gbps                                                                          |     | 1.8Gbps                                                                             | 1.8 Gbps                                                                            |
| Max. Forwarding Rate | 0.74Mpps                                                                          |                                                                                   |     | 1.34Mpps                                                                            |                                                                                     |
| High Priority Ports  | Port 1                                                                            |                                                                                   |     | Ports 1-2                                                                           | Port 1 - 2                                                                          |
| Flow Control         | IEEE802.3x full duplex                                                            |                                                                                   |     | IEEE802.3x full duplex                                                              |                                                                                     |
| PoE Standard         | IEEE802.3af, IEEE802.3at                                                          | IEEE 802.3af, IEEE802.3at                                                         |     | IEEE802.3af, IEEE802.3at                                                            | IEEE 802.3af, IEEE802.3at                                                           |
| PoE Power Budget     | 58W                                                                               |                                                                                   |     | 123W                                                                                | 58 W                                                                                |
| Working Mode         | Extend On:250m,10M,CAT 5eExtend Off:100m                                          |                                                                                   |     | Extend On:250m,10M,CAT 5eExtend Off:100m                                            | EXTEND OFF, EXTEND ON                                                               |
| Power Supply         | 51V DC, 1.25A                                                                     | 51 V DC, 1.25 A                                                                   |     | 51V DC, 2.5A                                                                        | 51 V DC                                                                             |
| Working Temperature  | 00-400                                                                            | 0 °C ~ 40 °C                                                                      |     | 00-400                                                                              | 0 °C ~ 40 °C                                                                        |



18 PORTS



NEW

26 PORTS



NEW

| Short Description    | 16-ports 100Mbps Unmanaged PoE Switch     | DS-3E Series Unmanaged PoE Switch   | 24-ports 100Mbps Unmanaged PoE Switch     | DS-3E Series Unmanaged PoE Switch |
|----------------------|-------------------------------------------|-------------------------------------|-------------------------------------------|-----------------------------------|
| Model                | DS-3E0318P-E                              | DS-3E0318P-E/M                      | DS-3E0326P-E                              | DS-3E0326P-E/M                    |
| Network Ports        | 18                                        | 18                                  | 26                                        | 26                                |
| Switching Capacity   | 7.2Gbps                                   | 7.2 Gbps                            | 8.8Gbps                                   | 8.8 Gbps                          |
| Max. Forwarding Rate | 5.36Mpps                                  |                                     | 6.55Mpps                                  |                                   |
| High Priority Ports  | Ports 1-8                                 | Port 1 - 8                          | Ports 1-8                                 | Port 1 - 8                        |
| Flow Control         | IEEE802.3x full duplex                    |                                     | IEEE802.3x full duplex                    |                                   |
| PoE Standard         | IEEE802.3af,IEEE802.3at                   | IEEE 802.3af, IEEE802.3at           | IEEE802.3af, IEEE802.3at                  | IEEE 802.3af, IEEE802.3at         |
| PoE Power Budget     | 230W                                      | 135 W                               | 370W                                      | 225 W                             |
| Working Mode         | Extend On:250m,10M,CAT 5e Extend Off:100m | Priority, Standard, Isolate, Extend | Extend On:250m,10M,CAT 5e Extend Off:100m |                                   |
| Power Supply         | 100-240V AC, 50/60Hz                      | 100-240 V AC, 50/60 Hz              | 100-240V AC, 50/60Hz                      | 100-240 V AC, 50/60 Hz            |
| Working Temperature  | 00-400                                    | 0 °C ~ 40 °C                        | 00-400                                    | 0 °C ~ 40 °C                      |

|                      | 10 PORTS                                                                          | 18 PORTS                                                                          | 26 PORTS                                                                            |
|----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                      |  |  |  |
| Short Description    | Web-managed PoE switch with 8 100M PoE electrical ports and 2 1000M COMBO ports   | Web-managed PoE switch with 16 100M PoE electrical ports and 2 1000M COMBO ports  | Web-managed PoE switch with 24 100M PoE electrical ports and 2 1000M COMBO ports    |
| Model                | DS-3E1310P-E                                                                      | DS-3E1318P-E                                                                      | DS-3E1326P-E                                                                        |
| Network Ports        | 10                                                                                | 18                                                                                | 26                                                                                  |
| Switching Capacity   | 802.3x, IEEE802.3z                                                                | 802.3x, IEEE802.3z                                                                | 8.8 Gbps                                                                            |
| Max. Forwarding Rate |                                                                                   |                                                                                   |                                                                                     |
| High Priority Ports  | Port 1 to 8                                                                       | Port 1 to 8                                                                       | Port 1 - 8                                                                          |
| Flow Control         |                                                                                   |                                                                                   |                                                                                     |
| PoE Standard         | IEEE 802.3af, IEEE802.3at                                                         | IEEE 802.3af, IEEE802.3at                                                         | IEEE 802.3af, IEEE802.3at                                                           |
| PoE Power Budget     | 123W                                                                              | 230W                                                                              | 370W                                                                                |
| Working Mode         | Extend On:250m,10M,CAT 5eExtend Off:100m                                          | Extend On:250m,10M,CAT 5e Extend Off:100m                                         |                                                                                     |
| Power Supply         | 100-240V AC, 50/60Hz                                                              | 100-240V AC, 50/60Hz                                                              | 100 to 240 VAC, 50/60Hz                                                             |
| Working Temperature  | 0~40 ℃                                                                            | 0~40 ℃                                                                            | 0 °C to +40 °C (+32 °F to +104 °F)                                                  |

|                                                                                                      |                                                                                                      |                                                                                                      |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 8 PORTS                                                                                              | 16 PORTS                                                                                             | 24 PORTS                                                                                             |
|                     |                     |                   |
| NEW                                                                                                  | NEW                                                                                                  | NEW                                                                                                  |
| DS-3E05-E Series Unmanaged Gigabit Switch                                                            | DS-3E05-E Series Unmanaged Gigabit Switch                                                            | DS-3E05-E Series Unmanaged Gigabit Switch                                                            |
| DS-3E0508-E                                                                                          | DS-3E0516-E                                                                                          | DS-3E0524-E                                                                                          |
| 8                                                                                                    | 16                                                                                                   | 24                                                                                                   |
|                                                                                                      |                                                                                                      |                                                                                                      |
| Ethernet: 14881 pps one portFast Ethernet: 148810 pps one portGigabit Ethernet: 1488100 pps one port | Ethernet: 14881 pps one portFast Ethernet: 148810 pps one portGigabit Ethernet: 1488100 pps one port | Ethernet: 14881 pps one portFast Ethernet: 148810 pps one portGigabit Ethernet: 1488100 pps one port |
|                                                                                                      |                                                                                                      |                                                                                                      |
|                                                                                                      |                                                                                                      |                                                                                                      |
|                                                                                                      |                                                                                                      |                                                                                                      |
|                                                                                                      |                                                                                                      |                                                                                                      |
| Input: 100-240 V AC, 50/60 Hz, 0.3 AOutput: 9 V DC, 1 A                                              | Input: 100-240 V AC, 50/60 Hz                                                                        | Input: 100-240 V AC, 50/60 Hz                                                                        |
| 0°C - 40°C                                                                                           | 0°C - 40°C                                                                                           | 0°C - 40°C                                                                                           |



|                     |                                                         |
|---------------------|---------------------------------------------------------|
| Short Description   | DS-6400HDI-T Series Decoder                             |
| Model               | DS-6400HDI-T                                            |
| HDMI Output         |                                                         |
| VGA Output          |                                                         |
| BNC Output          |                                                         |
| Decoding Resolution | 8MP                                                     |
| Decoding Channel    | 8MP: 2-ch 5MP: 4-ch 1080p: 8-ch 720p: 16-ch 4CIF: 32-ch |
| Decoding Capability | 8MP: 2-ch 5MP: 4-ch 1080p: 8-ch 720p: 16-ch 4CIF: 32-ch |
| Split Screen        | 1/4/9/16                                                |
| Network Interface   | 1; 10/100/1000 Mbps self-adaptive Ethernet interface    |
| Serial Interface    | 1 RS-232 (DB9), 1 RS-485                                |
| Two-Way Audio In    | 1-ch, 3.5 mm connector (2.0 Vp-p, 1 k $\Omega$ )        |
| Two-Way Audio Out   | 1-ch, 3.5 mm connector (2.0 Vp-p, 1 k $\Omega$ )        |
| Audio Output        | 8-ch, DB15 connector                                    |
| Alarm In            | 4-ch                                                    |
| Alarm Out           | 4-ch                                                    |
| Power Supply        | 100 to 240 VAC                                          |
| Power Consumption   | $\leq$ 108 W                                            |
| Working Temperature | -10° C to 55° C [14° F to 131° F]                       |
| Working Humidity    | 10% to 90%                                              |



|                     |                                                                                                                                                                                                                          |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Short Description   | DS-6900UDI SERIES DECODER                                                                                                                                                                                                |
| Model               | DS-6900UDI                                                                                                                                                                                                               |
| HDMI Output         | 4K: 3840 × 2160@30Hz ( for even interface only) 1080p: 1920 × 1080@50/60Hz WSXGA: 1680×1050/60Hz UXGA: 1600 × 1200@60Hz (for even interface only) 720p: 1280 × 720@50Hz/60Hz SXGA: 1280 × 1024@60Hz XGA: 1024 × 768@60Hz |
| VGA Output          | 1080p: 1920 × 1080@50/60Hz WSXGA: 1680×1050/60Hz SXGA: 1280 × 1024@60Hz 720p: 1280 × 720@50Hz/60Hz XGA: 1024 × 768@60Hz                                                                                                  |
| BNC Output          | 1-ch                                                                                                                                                                                                                     |
| Decoding Resolution | 12MP                                                                                                                                                                                                                     |
| Decoding Channel    | 16-ch                                                                                                                                                                                                                    |
| Decoding Capability | 12MP@20fps: 2-ch 8MP@30fps: 4-ch 5MP@30fps: 6-ch 3MP@30fps: 10-ch 1080p@30fps: 16-ch                                                                                                                                     |
| Split Screen        | 1/4/6/8/9/12/16                                                                                                                                                                                                          |
| Network Interface   | 1, 10/100/1000 Mbps self-adaptive Ethernet interface                                                                                                                                                                     |
| Serial Interface    | 1 RS-232 (RJ45), 1 RS-485                                                                                                                                                                                                |
| Two-Way Audio In    | 1-ch, 3.5 mm connector (2.0 Vp-p, 1 KΩ)                                                                                                                                                                                  |
| Two-Way Audio Out   | 1-ch, 3.5 mm connector (2.0 Vp-p, 1 KΩ)                                                                                                                                                                                  |
| Audio Output        | 1-ch                                                                                                                                                                                                                     |
| Alarm In            | 8-ch                                                                                                                                                                                                                     |
| Alarm Out           | 8-ch                                                                                                                                                                                                                     |
| Power Supply        | 12 VDC                                                                                                                                                                                                                   |
| Power Consumption   | ≤ 15 W                                                                                                                                                                                                                   |
| Working Temperature | -10 °C to +55 °C (14 °F to 131 °F)                                                                                                                                                                                       |
| Working Humidity    | 10% to 90%                                                                                                                                                                                                               |



| Short Description               | DS-6700 HFI series Encoder                                | DS-6700 HWI series Encoder                                | DS-6700HQHI-SATA Series Encoder                                           |
|---------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------|
| Model                           | DS-6700HFI                                                | DS-6700HWI                                                | DS-6700HQHI-SATA                                                          |
| Video compression               | H.264 / MPEG4 / MPEG2 / MJPEG                             | H.264 / MPEG4 / MPEG2 / MJPEG                             | H.264                                                                     |
| Analog video input              | 1-ch                                                      | 1-ch                                                      | 8-ch                                                                      |
| Audio input                     | 1-ch, 3.5mm interface (2.0 Vp-p, 1 k $\Omega$ ) (Line in) | 1-ch, 3.5mm interface (2.0 Vp-p, 1 k $\Omega$ ) (Line in) | 4-ch, RCA (2.0 Vp-p, 1 k $\Omega$ )                                       |
| Two-way audio in                | 1-ch, 3.5mm interface (2.0 Vp-p, 1 k $\Omega$ )           | 1-ch, 3.5mm interface (2.0 Vp-p, 1 k $\Omega$ )           | 1-ch, RCA (2.0 Vp-p, 1 k $\Omega$ )(using the 1st channel of audio input) |
| HDMI/VGA output                 |                                                           |                                                           |                                                                           |
| HDMI2 output                    |                                                           |                                                           |                                                                           |
| Encoding resolution             | 4CIF / 2CIF / CIF / QCIF                                  | 4CIF / 2CIF / CIF / QCIF                                  |                                                                           |
| Video bitrate                   | 32 Kbps ~ 3072 Kbps, or user defined (Max. 8192 Mbps)     | 32 Kbps ~ 3072 Kbps, or user defined (Max. 8192 Mbps)     | 32 Kbps to 10 Mbps                                                        |
| Audio output                    | 1-ch, 3.5mm interface (Linear, 600 $\Omega$ )             | 1-ch, 3.5mm interface (Linear, 600 $\Omega$ )             | 1-ch, RCA (Linear, 1 k $\Omega$ )                                         |
| Audio bitrate                   | 64 Kbps                                                   | 64 Kbps                                                   | 64 Kbps                                                                   |
| SATA                            | 1 microSD, up to 32GB                                     | 1 microSD, up to 32GB                                     | 1 SATA interface                                                          |
| Capacity                        |                                                           |                                                           | Up to 6 TB capacity for each disk                                         |
| Network interface               | 1x 10M/100Mself-adaptive Ethernet interface               | 1x 10M/100Mself-adaptive Ethernet interface               | 1, RJ45 10M/100M self-adaptive Ethernet interface                         |
| Serial interface                | 1 half-duplex RS-485 interface                            | 1 half-duplex RS-485 interface                            | 1, RS-485; half-duplex                                                    |
| Alarm in/out                    | 1/1                                                       | 1/1                                                       | 8/4                                                                       |
| Power supply                    | 12V DC adapter, or via PoE                                | 12V DC adapter, or via PoE                                | 12 VDC                                                                    |
| Consumption(without hard disks) | $\leq$ 6 W                                                | $\leq$ 6 W                                                | $\leq$ 30 W                                                               |
| Working temperature             | -10 °C ~ +55 °C (14 °F ~ 131 °F)                          | -10 °C ~ +55 °C (14 °F ~ 131 °F)                          | -10 °C to +55 °C (14 °F to 131 °F)                                        |
| Working humidity                | 10% ~ 90%                                                 | 10% ~ 90%                                                 | 10% to 90%                                                                |
| Chassis                         |                                                           |                                                           | 380 mm 1U chassis                                                         |



| Short Description      | DS-1005KI USB Keyboard                         | DS-1100KI Network Keyboard                 | DS-1200KI Series Network Keyboard                 |
|------------------------|------------------------------------------------|--------------------------------------------|---------------------------------------------------|
| Model                  | DS-1005KI                                      | DS-1100KI                                  | DS-1200KI                                         |
| LCD screen             |                                                | 800 × 480 pixel screen                     | 128 x 64 pixel screen                             |
| Joystick               | 3-axis joystick                                | 4-axis joystick                            | 4-axis joystick                                   |
| Control mode           |                                                | IP-based                                   | Network, RS-232, RS-422, RS-485                   |
| Network interface      |                                                | 1; 10M/100M/1000M Ethernet interface       | 1; 10 M/100 Mbps self-adaptive Ethernet interface |
| Serial interface       |                                                | 1 RS-232, 1 RS-485                         | 1 RS-232, 1 RS-422, 1 RS-485                      |
| USB interface          | USB 2.0                                        | USB 2.0                                    | USB 2.0                                           |
| Power supply           | 5V DC via USB                                  | 12V DC                                     | 12V DC                                            |
| Consumption            | ≤ 5W                                           | ≤ 15W                                      | ≤ 4.5 W                                           |
| Working temperature    | -10 °C~55 °C (14 °F~131 °F)                    | -10 °C~55 °C (14 °F~131 °F)                | -10 °C~55 °C (14 °F~131 °F)                       |
| Working humidity       | 10%~90%                                        | 10%~90%                                    | 10%~90%                                           |
| Dimensions (W × D × H) | 167 × 177.5 × 116 mm (6.57 × 6.99 × 4.57 inch) | 435 × 193 × 110 mm (17.1 × 7.6 × 4.3 inch) | 435 × 193 × 110 mm (17.1 × 7.6 × 4.3 inch)        |
| Weight                 |                                                | 2 Kg (4.4 lb)                              | ≤ 1 kg (2.2 lb)                                   |





|                        |                                              |                                            |
|------------------------|----------------------------------------------|--------------------------------------------|
| Short Description      | DS-1004KI RS-485 Keyboard                    | DS-1006KI Series Keyboard                  |
| Model                  | DS-1004KI                                    | DS-1006KI                                  |
| LCD screen             |                                              | 128 x 64 pixel screen                      |
| Joystick               | 4-axis joystick                              | 4-axis joystick                            |
| Control mode           | RS-485 and RS-232                            | RS-232, RS-422, RS-485                     |
| Network interface      |                                              |                                            |
| Serial interface       | 1 RS-485 and 1 RS-232                        | 1 RS-232, 1 RS-422, 1 RS-485               |
| USB interface          |                                              | USB 2.0                                    |
| Power supply           | 12V DC                                       | 12V DC                                     |
| Consumption            | ≤10W                                         | ≤ 4.5 W                                    |
| Working temperature    | -10 °C~55 °C (14 °F~131 °F)                  | -10 °C~55 °C (14 °F~131 °F)                |
| Working humidity       | 10%~90%                                      | 10%~90%                                    |
| Dimensions (W × D × H) | 434 × 163 × 43 mm (17.09 × 6.42 × 1.69 inch) | 435 × 193 × 110 mm (17.1 × 7.6 × 4.3 inch) |
| Weight                 | ≤1.25Kg (2.76lb)                             | ≤ 1 kg (2.2 lb)                            |

DS-1H05-R

Coaxial to Network Transmission  
Accessory

DS-1H05-T

Network to Coaxial Transmission  
Accessory

DS-1H18

TVI-UTP Video Balun



DS-1H18S

TVI-UTP Video Balun



DS-1LN5E-S  
U/UTP 4Pairs cable-category 5E-  
PVC Sheath



DS-1LN6-UU  
U/UTP 4Pairs cable-category 6-  
PVC Sheath



ST1000VX001

Seagate Skyhawk 1T HDD



ST1000VX001-520

Seagate Skyhawk 1T HDD with  
Hikvision logo

ST2000VX003

Seagate Skyhawk 2T HDD



ST2000VX003-520

Seagate Skyhawk 2T HDD with  
Hikvision logo

WD10PURX

Western Digital 1T HDD



WD10PURX-78

Western Digital 1T HDD with  
Hikvision logo

WD20PURX

Western Digital 2T HDD



WD20PURX-78

Western Digital 2T HDD with  
Hikvision logo

HS-TF-H1I/32G

microSDHC™/32GB/Class10/MLC



HS-TF-H1I/64G

microSDXC™/64GB/Class10/MLC



HS-TF-L2I/128G

microSDXC™/128GB/Class10/TLC



HS-TF-L2I/16G

microSDHC™/16GB/Class10/TLC



HS-TF-L2I/32G

microSDHC™/32GB/Class10/TLC



HS-TF-L2I/64G

microSDXC™/64GB/Class10/TLC




DS-1H34-0101P  
PoE Video Repeater



DS-1H34-0102P  
PoE Video Repeater



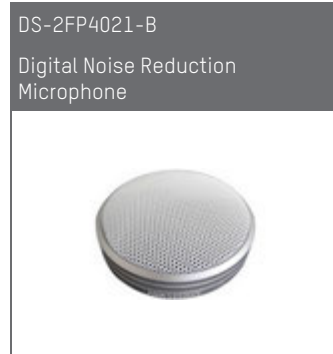

DS-1203ZJ

Bracket



DS-1227ZJ

Bracket



DS-1250ZJ

Bracket



DS-1258ZJ

Bracket



DS-1259ZJ

Bracket



DS-1260ZJ

Bracket



DS-1271ZJ-110

Bracket



DS-1271ZJ-120

Bracket



DS-1271ZJ-130

Bracket



DS-1271ZJ-135

Bracket



DS-1271ZJ-DM25

Bracket



DS-1271ZJ-DM30



DS-1272ZJ-110

Bracket



DS-1272ZJ-110B

Bracket



DS-1272ZJ-110-TRS

Bracket





DS-1272ZJ-120

Bracket



DS-1272ZJ-120B

Bracket



DS-1273ZJ-130

Bracket



DS-1273ZJ-130-TRL

Bracket



DS-1273ZJ-135

Bracket



DS-1273ZJ-135B

Bracket



DS-1273ZJ-140

Bracket



DS-1273ZJ-140B

Bracket



DS-1273ZJ-160

Bracket



DS-1273ZJ-160B

Bracket



DS-1273ZJ-DM25

Bracket



DS-1273ZJ-DM30-B

Bracket



DS-1273ZJ-DM32

Bracket



DS-1273ZJ-PT6

Bracket



DS-1275ZJ

Bracket



DS-1276ZJ

Bracket



DS-1280ZJ-DM18

Bracket



DS-1280ZJ-DM20

Bracket



DS-1280ZJ-DM21

Bracket



DS-1280ZJ-DM22

Bracket



DS-1280ZJ-DM25

Bracket



DS-1280ZJ-DM26

Bracket




DS-1280ZJ-M

Bracket



DS-1280ZJ-PT3

Bracket



DS-1280ZJ-S

Bracket




DS-1280ZJ-XS

Bracket



DS-1281ZJ-DM23

Bracket



DS-1281ZJ-M

Bracket



DS-1290ZJ-BL

Bracket



DS-1291ZJ-BL

Bracket



DS-1293ZJ

Bracket



DS-1294ZJ

Bracket



DS-1602ZJ

Bracket



DS-1602ZJ-BOX

Bracket



DS-1602ZJ-BOX-CORNER

Bracket



DS-1602ZJ-BOX-POLE

Bracket



DS-1602ZJ-Corner

Bracket



DS-1602ZJ-Pole

Bracket



DS-1603ZJ

Bracket



DS-1604ZJ

Bracket



DS-1605ZJ

Bracket



DS-1618ZJ

Bracket



DS-1660ZJ

Bracket



DS-1661ZJ

Bracket



DS-1662ZJ

Bracket



DS-1663ZJ

Bracket



DS-1668ZJ



DS-1678ZJ

Bracket



# BRACKET

## IP CAMERA

| Product form                                                                      | Model                               | Relevant brackets and housings                                                    |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Box camera 14                                                                     | DS-2CD40XXF(WD)-XXXX<br>DS-2CD4CXFW | Indoor                                                                            |                                                                                    | Indoor housing                                                                      |                                                                                     | Outdoor housing                                                                     |                                                                                     |
|                                                                                   |                                     |  |  |  |  |  |  |
|  |                                     | DS-1299ZJ                                                                         | DS-1292ZJ                                                                          | DS-1332HZ                                                                           | DS-1330HZ                                                                           | DS-1331HZ Series                                                                    | DS-1340HZ                                                                           |
|                                                                                   |                                     | Pendant Mount                                                                     | Wall mount                                                                         | Indoor housing                                                                      | Indoor housing                                                                      | Outdoor housing                                                                     | Outdoor housing                                                                     |
|                                                                                   |                                     | Hik white<br>Aluminum Alloy<br>77×77×198mm<br>165g                                | Hik white<br>Aluminum alloy<br>70×97.1×217.9mm<br>201g                             | Hik white<br>Aluminum alloy<br>288×149×100mm<br>800g                                | Hik white<br>Complex fiber<br>290×142×92mm<br>640g                                  | Hik white<br>Aluminum alloy                                                         | Three-axis adjustment<br>Containing combined wires<br>and fan<br>IK10               |

| Product form                                                                      | Model                         | Relevant brackets and housings                                                    |
|-----------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------|
| Box camera 14                                                                     | DS-2CD20XX<br>DS-2CD20X5FWD-I | Indoor/Outdoor                                                                    |
|                                                                                   |                               |  |
|  |                               | DS-1280ZJ-XS                                                                      |
|                                                                                   |                               | Junction box                                                                      |
|                                                                                   |                               | Hik white<br>Aluminum Alloy<br>Φ100 x 43.2 x 129mm<br>320g                        |

| Product form                                                                        | Model             | Relevant brackets and housings                                                        |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Bullet camera 40                                                                    | DS-2CD26X5FWD-IZS | Indoor/Outdoor                                                                        |                                                                                     |
|                                                                                     |                   |    |  |
|  |                   | DS-1475ZJ-SUS                                                                         | DS-1476ZJ-SUS                                                                       |
|                                                                                     |                   | Vertical pole mount                                                                   | Corner mount                                                                        |
|                                                                                     |                   | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Φ67-127mm<br>1205g | Hik white<br>Stainless Steel<br>126×105×250mm<br>2280g                              |

| Product form                                                                        | Model                                          | Relevant brackets and housings                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Bullet camera 17                                                                    | DS-2CD2622FWD-I(W)(S)<br>DS-2CD2642FWD-I(Z)(S) | Indoor/Outdoor                                                                      |                                                                                       |                                                                                       |                                                                                       | Outdoor                                                                               |
|                                                                                     |                                                |  |   |  |  |  |
|  |                                                | DS-1260ZJ                                                                           | DS-1275ZJ-SUS                                                                         | DS-1280ZJ-S                                                                           | DS-1276ZJ-SUS                                                                         | Rubber sleeve                                                                         |
|                                                                                     |                                                | Junction box                                                                        | Vertical pole mount                                                                   | Junction box                                                                          | Corner mount                                                                          | Rubber sleeve with weather proof                                                      |
|                                                                                     |                                                | Hik white<br>Aluminum alloy<br>Φ105 mm                                              | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Φ67-127mm<br>1205g | Hik white<br>Aluminum alloy<br>Φ137 x 53.4x 164.8mm<br>527g                           | Hik white<br>Stainless Steel<br>126×105×250mm<br>2280g                                | Hik white<br>Rubber                                                                   |

| Product form                                                                      | Model      | Relevant brackets and housings                                                        |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Bullet camera 23                                                                  | DS-2CD2TXX | Indoor/Outdoor                                                                        |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |            |      |  |  |  |
|  |            | DS-1275ZJ-SUS                                                                         | DS-1280ZJ-S                                                                         | DS-1260ZJ                                                                           | DS-1276ZJ-SUS                                                                       |
|                                                                                   |            | Vertical pole mount                                                                   | Junction box                                                                        | Junction box                                                                        | Corner mount                                                                        |
|                                                                                   |            | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm<br>1205g | Hik white<br>Aluminum alloy<br>137×53.4×164.8mm<br>527g                             | Hik white<br>Aluminum alloy<br>Ø105 mm                                              | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g                              |

| Product form                                                                      | Model                      | Relevant brackets and housings                                                        |                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Bullet camera 24                                                                  | DS-2CD4AXXF(WD)-I(Z)(H)(S) | Indoor/Outdoor                                                                        |                                                                                   |                                                                                     |
|                                                                                   |                            |      |  |  |
|  |                            | DS-1275ZJ-SUS                                                                         | DS-1276ZJ-SUS                                                                     | Rubber sleeve                                                                       |
|                                                                                   |                            | Vertical pole mount                                                                   | Corner mount                                                                      | Rubber sleeve with weather proof                                                    |
|                                                                                   |                            | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm<br>1205g | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g                            | Hik white<br>Rubber                                                                 |

| Product form                                                                        | Model                | Relevant brackets and housings                                                      |
|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|
| Bullet camera 28                                                                    | DS-2CD20XXF(WD)-I(W) | Indoor/Outdoor                                                                      |
|                                                                                     |                      |  |
|  |                      | DS-1280ZJ-S                                                                         |
|                                                                                     |                      | Junction box                                                                        |
|                                                                                     |                      | Hik white<br>Aluminum alloy<br>137×53.4×164.8mm<br>527g                             |

| Product form                                                                        | Model                      |                                                                                                       |
|-------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------------------------|
|                                                                                     | DS-2CD46XXF(WD)-I(Z)(H)(S) | Indoor/Outdoor<br> |
|  |                            | DS-1275ZJ-4626                                                                                        |
|                                                                                     |                            | Vertical Pole Mount                                                                                   |
|                                                                                     |                            | Hik white<br>Steel(mounting board) &<br>Stainless Steel(clamp)<br>127×46×250mm<br>1235g               |

| Product form                                                                         | Model                                                                                                                                                                  | Relevant brackets and housings                                                        |                                                                                                                       |                                                                                                                           |                                                                                       |                                                                                       |                                                                                               |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Box camera                                                                           | DS-2CD40XXF/E-(H)(IR5)(IRA)<br>DS-2CD40xxFWD/E-(H)(IR5)(IRA)<br>DS-2CD40xxFWD/E-(H)(IR5)(3.8-16mm)<br>DS-2CD40xxFWD/E-(H)(IRA)(11-40mm)<br>DS-2CD4026FWD/E-(H)(7-33mm) | Indoor/Outdoor                                                                        |                                                                                                                       |                                                                                                                           |                                                                                       |                                                                                       |                                                                                               |
|                                                                                      |                                                                                                                                                                        |  |                                  |                                      |  |  |          |
|  |                                                                                                                                                                        | DS-1293ZJ                                                                             | DS-1214ZJ                                                                                                             | DS-1275ZJ-SUS                                                                                                             | DS-1269ZJ                                                                             | DS-1233ZJ                                                                             | DS-1276ZJ                                                                                     |
|                                                                                      |                                                                                                                                                                        | Wall mount                                                                            | Horizontal pole mount                                                                                                 | Vertical pole mount                                                                                                       | Pendant Mount                                                                         | Column Mount                                                                          | Corner mount                                                                                  |
|                                                                                      |                                                                                                                                                                        | Hik white<br>Aluminum alloy<br>88×116.6×<br>297.3mm<br>473g"                          | Hik white<br>Steel(mounting board) &<br>Stainless Steel(clamp)<br>117×226×194mm<br>Diameter of clamp: Ø67-127mm 1895g | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm 1205g<br>Match up with wall mount(DS-1293ZJ) | Hik white<br>Aluminum alloy<br>493x246x88mm<br>480g                                   | Hik white<br>Steel<br>Ø160 x 1093mm<br>6200g                                          | Hik white<br>Stainless Steel<br>126×105×250mm<br>2280g<br>Match up with wall mount(DS-1293ZJ) |

| Product form                                                                      |                                                                                   | Model                                                                        | Relevant brackets and housings                                                    |                                                                                    |                                                                                     |                                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dome camera 7                                                                     |  | DS-2CD2520F<br>DS-2CD2510F<br>DS-2CD2522FWD-I(W)(S)<br>DS-2CD2542FWD-I(W)(S) | Indoor/Outdoor                                                                    |                                                                                    |                                                                                     |                                                                                                   |                                                                                     |                                                                                     |
|                                                                                   |                                                                                   |                                                                              |  |  |  |                |  |  |
|  |                                                                                   |                                                                              | DS-1272ZJ-120                                                                     | DS-1272ZJ-120B                                                                     | DS-1271ZJ-120                                                                       | DS-1276ZJ-SUS                                                                                     | DS-1282ZJ-DM mini                                                                   | DS-1280ZJ-DM22                                                                      |
|                                                                                   |                                                                                   |                                                                              | Wall mount                                                                        | Wall mount                                                                         | Pendant mount                                                                       | Corner mount                                                                                      | Gang box                                                                            | Junction box                                                                        |
|                                                                                   |                                                                                   |                                                                              | Hik white<br>Aluminum alloy<br>120×122×173.5mm<br>430g                            | Hik white<br>Aluminum alloy<br>with junction box<br>123×180×223mm<br>1225g         | Hik white<br>Aluminum alloy<br>Φ150×573mm<br>1900g                                  | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall mount(DS-1272ZJ-120) | Hik white<br>Plastic<br>Φ120 mm                                                     | Hik white<br>Aluminum alloy<br>164.8×137×53.4mm<br>520g                             |

| Product form   |                                                                                   | Model                                                                                                           | Relevant brackets and housings                                                    |                                                                                   |                                                                                    |                                                                                     |                                                                                                   |                                                                                     |                                                                                     |                                                                                                   |                                                                                     |
|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dome camera 18 |  | DS-2CD21XXF-I(W)(S)<br>DS-2CD2122FWD-I(W)(S)<br>DS-2CD2142FWD-I(W)(S)<br>DS-2CD21X5FWD-I(S)<br>DS-2CD2125FWD-IM | Indoor/Outdoor(suitable for indoor)                                               |                                                                                   |                                                                                    |                                                                                     |                                                                                                   |                                                                                     |                                                                                     |                                                                                                   |                                                                                     |
|                |                                                                                   |                                                                                                                 |  |  |  |  |                |  |  |                |  |
|                |                                                                                   |                                                                                                                 | DS-1259ZJ                                                                         | DS-1271ZJ-110                                                                     | DS-1272ZJ-110                                                                      | DS-1272ZJ-110B                                                                      | DS-1276ZJ-SUS                                                                                     | DS-1280ZJ-DM18                                                                      | DS-1258ZJ                                                                           | DS-1253ZJ-M                                                                                       | DS-1250ZJ                                                                           |
|                |                                                                                   |                                                                                                                 | Inclined ceiling mount                                                            | Pendant mount                                                                     | Wall mount                                                                         | Wall mount                                                                          | Corner mount                                                                                      | Junction box                                                                        | Wall mount                                                                          | Rain shade                                                                                        | Rain shade                                                                          |
|                |                                                                                   |                                                                                                                 | Hik white<br>ABS Plastic<br>Φ111×39.2mm<br>200g                                   | Hik white<br>Aluminum alloy<br>Φ150×560mm<br>1900g                                | Hik white<br>Aluminum alloy<br>120×122×169mm<br>420g                               | Hik white<br>Aluminum alloy<br>with junction box<br>123×180×227.8mm<br>1205g        | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g Match up with<br>wall mount(DS-1272ZJ-110) | Hik white<br>Aluminum alloy<br>Φ115.4×43.8mm<br>450g                                | Hik white<br>ABS plastic<br>120×111×161.5mm<br>200g                                 | Hik white<br>Composite Fibre<br>Φ191.1×76mm<br>133g<br>Match up with<br>wall mount(DS-1272ZJ-110) | Hik white<br>Composite Fibre<br>264.7*152*189.6<br>mm<br>199g                       |

| Product form   |                                                                                     | Model                                          |                                                                                     | Relevant brackets and housings                                                      |                                                                                     |                                                                                                                                             |                                                                                                          |                                                                                       |                                                                                       |                                                                                       |                                                                                                       |                                                                                       |                                                                                       |
|----------------|-------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dome camera 21 |  | DS-2CD2722FWD-I(Z)(S)<br>DS-2CD2742FWD-I(Z)(S) | Indoor/Outdoor                                                                      |                                                                                     |                                                                                     |                                                                                                                                             |                                                                                                          |                                                                                       |                                                                                       |                                                                                       |                                                                                                       |                                                                                       |                                                                                       |
|                |                                                                                     |                                                |  |  |  |                                                        |                     |  |  |  |                  |  |  |
|                |                                                                                     |                                                | DS-1271ZJ-135                                                                       | DS-1273ZJ-135                                                                       | DS-1273ZJ-135B                                                                      | DS-1275ZJ-SUS                                                                                                                               | DS-1276ZJ-SUS                                                                                            | DS-1227ZJ                                                                             | DS-1280ZJ-DM21                                                                        | DS-1281ZJ-DM23                                                                        | DS-1253ZJ-L                                                                                           | DS-1250ZJ                                                                             | DS-1258ZJ-L                                                                           |
|                |                                                                                     |                                                | Pendant mount                                                                       | Wall mount                                                                          | Wall mount with junction box                                                        | Vertical pole mount                                                                                                                         | Corner mount                                                                                             | In-ceiling mount                                                                      | Junction box                                                                          | Inclined ceiling mount                                                                | Rain shade                                                                                            | Rain shade                                                                            | Wall mount                                                                            |
|                |                                                                                     |                                                | Hik white<br>Aluminum alloy<br>150<br>×150×565mm<br>1900g                           | Hik white<br>Aluminum alloy<br>136<br>×183.5×230mm<br>704g                          | Hik white<br>Aluminum alloy<br>with junction box<br>136×243<br>×290mm 1490g         | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of<br>clamp: Ø67-<br>127mm 1205g<br>Match up with<br>wall mount(DS-<br>1273ZJ-135) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with<br>wall mount(DS-<br>1273ZJ-135) | Hik white<br>Aluminum alloy S<br>ABS Plastic<br>Ø210×90mm<br>540g                     | Hik white<br>Aluminum alloy<br>162×137×42mm<br>250g                                   | Hik white<br>Aluminum alloy<br>136<br>.3×136.3×48mm<br>245g                           | Hik white<br>Composite Fibre<br>Ø225.1×98mm<br>198g Match<br>up with wall<br>mount(DS-<br>1273ZJ-135) | Hik white<br>Composite Fibre<br>264.7*152<br>*189.6 mm<br>199g                        | Hik white<br>Plastic<br>136×183×<br>213mm<br>260g                                     |

| Product form                                                                      | Model             | Relevant brackets and housings                                                    |                                                                                     |                                                                                                                                  |                                                                                                   |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|  | DS-2CD27X5FWD-IZS | Indoor/Outdoor                                                                    |                                                                                     |                                                                                                                                  |                                                                                                   |
|                                                                                   |                   |  |  |                                               |                |
|                                                                                   |                   | DS-1471ZJ-155<br>Pendant Mount                                                    | DS-1473ZJ-155<br>Wall Mount                                                         | DS-1475ZJ-SUS<br>Vertical pole mount                                                                                             | DS-1476ZJ-SUS<br>Corner mount                                                                     |
|                                                                                   |                   | Hik white<br>Aluminum alloy<br>Φ155×150×565mm                                     | Hik white<br>Aluminum alloy<br>155×183.5×240mm                                      | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Φ67-127mm<br>1205g<br>Match up with wall mount(DS-1473ZJ-155) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall mount(DS-1473ZJ-155) |

| Product form | Model                                                               | Relevant brackets and housings                                                    |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                                                                 |                                                                                                                      |                                                                                     |                                                                                     |
|--------------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dome 25      | DS-2CD6362F-I(S)(V)<br>DS-2CD6332FWD-I(S)(V)<br>DS-2CD63C2F-I(V)(S) | Indoor/Outdoor                                                                    |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                                                                 |                                                                                                                      |                                                                                     |                                                                                     |
|              |                                                                     |  |  |  |  |  |                                              |                                   |  |  |
|              |                                                                     | DS-1271ZJ-DM25<br>Pendant mount                                                   | DS-1273ZJ-DM25<br>Wall mount                                                      | DS-1280ZJ-DM25<br>Junction box                                                     | DS-1281ZJ-DM25<br>Inclined ceiling mount                                            | DS-1283ZJ<br>Three axis adjustment                                                  | DS-1275ZJ-SUS<br>Vertical pole mount                                                                                            | DS-1276ZJ-SUS<br>Corner mount                                                                                        | DS-1274ZJ-DM25<br>Corner mount                                                      | DS-1281ZJ-DM25-B<br>Pendant mount                                                   |
|              |                                                                     | Hik white<br>Alluminum alloy<br>Φ149.5×555mm<br>1930g                             | Hik white<br>Aluminum alloy<br>183.5×164×231.7mm<br>900g                          | Hik white<br>Aluminum alloy<br>178.5×164×41mm<br>340g                              | Hik white<br>Aluminum alloy<br>157.1×164×45.5mm<br>300g                             | Hik white<br>Aluminum alloy<br>167.5×167.5<br>×48.7mm                               | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp:<br>Φ67-127mm 1205g<br>Match up with wall<br>mount(DS-1283ZJ) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g Match up with<br>wall mount(DS-<br>1273ZJ-130, DS-<br>1283ZJ) | Hik white<br>Aluminum alloy<br>209×195×114mm                                        | Hik white<br>Aluminum alloy<br>161×156×165.5mm                                      |

| Product form | Model                      | Relevant brackets and housings                                                      |                                                                                     |                                                                                       |                                                                                       |                                                                                       |                                                                                                                                             |                                                                                                      |                                                                                       |
|--------------|----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Dome 26      | DS-2CD45XXF(WD)-I(Z)(H)(S) | Indoor/Outdoor                                                                      |                                                                                     |                                                                                       |                                                                                       |                                                                                       |                                                                                                                                             |                                                                                                      |                                                                                       |
|              |                            |  |  |  |  |  |                                                        |                 |  |
|              |                            | DS-1273ZJ-DM26<br>Wall mount                                                        | DS-1273ZJ-DM26-B<br>Wall mount with<br>junction box                                 | DS-1271ZJ-DM26<br>Pendant mount                                                       | GP-FE1<br>Gang box for junction<br>box<br>(special for US market)                     | DS-1250ZJ<br>Rain shade                                                               | DS-1275ZJ-SUS<br>Vertical pole mount                                                                                                        | DS-1276ZJ-SUS<br>Corner mount                                                                        | DS-1227ZJ-DM26<br>In-ceiling Mount                                                    |
|              |                            | Hik white<br>Alluminum alloy<br>255×225.7×185mm<br>1550g                            | Hik white<br>Alluminum alloy<br>314.5×260×184.9mm<br>2050g                          | Hik white<br>Alluminum alloy<br>676×185×185mm<br>2150g                                | Hik white<br>Steel<br>Φ195mm                                                          | Hik white<br>Composite Fibre<br>264.7*152*189.6 mm<br>199g                            | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp:<br>Φ67-127mm<br>1205g<br>Match up with wall<br>mount(DS-1273ZJ-<br>DM26) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall<br>mount(DS-1273ZJ-130) | Hik white<br>Aluminum alloy<br>Φ225×98mm                                              |



| Product form                                                                      | Model                  | Relevant brackets and housings                                                    |                                                                                     |                                                                                                                                   |                                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dome 32                                                                           | DS-2CD4D16/26FWD-IZ(S) | indoor/Outdoor                                                                    |                                                                                     |                                                                                                                                   |                                                                                                    |                                                                                     |
|                                                                                   |                        |  |  |                                                |                 |  |
|  |                        | DS-1273ZJ-DM32                                                                    | DS-1271ZJ-DM32                                                                      | DS-1275ZJ-SUS                                                                                                                     | DS-1276ZJ-SUS                                                                                      | DS-1227ZJ-DM32                                                                      |
|                                                                                   |                        | Wall mount                                                                        | Pendent mount                                                                       | Vertical pole mount                                                                                                               | Corner mount                                                                                       | In-ceiling Mount                                                                    |
|                                                                                   |                        | Hikvision white<br>Aluminum alloy<br>183.5×142×232mm                              | Hikvision white<br>Aluminum alloy<br>Φ150×565mm                                     | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Φ67-127mm<br>1205g<br>Match up with wall mount(DS-1273ZJ-DM32) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall mount(DS-1273ZJ-DM32) | Hik white<br>Aluminum alloy<br>Φ225×98mm                                            |

| Product form                                                                      | Model                                                        | Relevant brackets and housings                                                    |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dome 27                                                                           | DS-2CD29XXF-II(S)<br>DS-2CD2935FWD-II(S)<br>DS-2CD2955FWD-IS | Indoor                                                                            |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |                                                              |  |  |  |  |
|  |                                                              | DS-1294ZJ                                                                         | DS-1281ZJ-DM27                                                                      | DS-1297ZJ                                                                           | DS-1299ZJ                                                                           |
|                                                                                   |                                                              | Wall mount                                                                        | Inclined ceiling mount                                                              | Pendant mount (extendable)                                                          | Pendant Mount                                                                       |
|                                                                                   |                                                              | Hik white<br>Toughened Plastic<br>223.9×80×125.8mm<br>450g                        | Hik white<br>Plastic<br>111.8×40.5×108.3mm<br>45.8g                                 | Hik white<br>Aluminum alloy<br>(Hight 1000-2000mm)                                  | Hik white<br>Aluminum Alloy<br>77×77×198mm<br>165g                                  |

| Product form                                                                        | Model                            | Relevant brackets and housings                                                      |                                                                                                                                |                                                                                                    |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Mini dome camera 8                                                                  | DS-2CD2322WD-I<br>DS-2CD2342WD-I | Indoor/Outdoor                                                                      |                                                                                                                                |                                                                                                    |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|                                                                                     |                                  |  |                                             |               |  |  |  |  |
|  |                                  | DS-1273ZJ-130-TRL                                                                   | DS-1275ZJ-SUS                                                                                                                  | DS-1276ZJ-SUS                                                                                      | DS-1280ZJ-DM8                                                                         | DS-1281ZJ-M                                                                           | DS-1280ZJ-M                                                                           | DS-1271ZJ-130-TRL                                                                     |
|                                                                                     |                                  | Wall mount                                                                          | Vertical pole mount                                                                                                            | Corner mount                                                                                       | Junction box                                                                          | Inclined ceiling mount                                                                | Junction box                                                                          | Pendant mount                                                                         |
|                                                                                     |                                  | Hik white<br>Aluminum alloy<br>131×183.5×228.5mm<br>890g                            | Hik white<br>Stainless Steel 127×46×250mm<br>Diameter of clamp: Φ67-127mm 1205g<br>Match up with wall mount(DS-1273ZJ-130-TRL) | Hik white<br>Stainless Steel 126X105X250mm<br>2280g<br>Match up with wall mount(DS-1273ZJ-130-TRL) | Hik white<br>Aluminum alloy<br>Φ126.7mm×35mm                                          | Hik white<br>Aluminum alloy<br>157×165.7×61.8mm<br>586g                               | Hik white<br>Aluminum alloy<br>157×184.8×53.4mm<br>621g                               | Hikvision white<br>Aluminum alloy<br>Φ150×567mm                                       |

| Product form                                                                      | Model           | Relevant brackets and housings                                                    |                                                                                                                                     |                                                                                                      |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Mini dome camera<br>18                                                            | DS-2CD23X5FWD-I | Indoor/Outdoor                                                                    |                                                                                                                                     |                                                                                                      |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |                 |  |                                                    |                   |  |  |  |
|  |                 | DS-1273ZJ-130-TL                                                                  | DS-1275ZJ-SUS                                                                                                                       | DS-1276ZJ-SUS                                                                                        | DS-1280ZJ-DM8                                                                       | DS-1281ZJ-M                                                                         | DS-1271ZJ-130-TL                                                                    |
|                                                                                   |                 | Wall mount                                                                        | Vertical pole mount                                                                                                                 | Corner mount                                                                                         | Junction box                                                                        | Inclined ceiling mount                                                              | Pendant mount                                                                       |
|                                                                                   |                 | Hik white<br>Aluminum alloy<br>131×183.5×228.5mm<br>890g                          | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm<br>1205g<br>Match up with wall mount(DS-1273ZJ-130-TL) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall mount(DS-1273ZJ-130-TL) | Hik white<br>Aluminum alloy<br>Ø126.7mm×35mm                                        | Hik white<br>Aluminum alloy<br>157×165.7×61.8mm<br>586g                             | Hikvision white<br>Aluminum alloy<br>Ø150×567mm                                     |

| Product form                                                                      | Model             | Relevant brackets and housings                                                    |                                                                                   |                                                                                     |                                                                                                                                  |                                                                                                   |                                                                                     |
|-----------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                   | DS-2CD2HX5FWD-IZS | Indoor/Outdoor                                                                    |                                                                                   |                                                                                     |                                                                                                                                  |                                                                                                   |                                                                                     |
|                                                                                   |                   |  |  |  |                                               |                |  |
|  |                   | DS-1473ZJ-135                                                                     | DS-1471ZJ-135                                                                     | DS-1281ZJ-DM23                                                                      | DS-1475ZJ-SUS                                                                                                                    | DS-1476ZJ-SUS                                                                                     | DS-1473ZJ-135B                                                                      |
|                                                                                   |                   | Wall mount                                                                        | Pendant mount                                                                     | Inclined ceiling mount                                                              | Vertical pole mount                                                                                                              | Corner mount                                                                                      | Wall mount with junction box                                                        |
|                                                                                   |                   | Hik white<br>Aluminum alloy<br>136×183.5×230mm<br>704g                            | Hik white<br>Aluminum alloy<br>150×150×565mm<br>1900g                             | Hik white<br>Aluminum alloy<br>136.3×136.3×48mm<br>245g                             | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm<br>1205g<br>Match up with wall mount(DS-1473ZJ-135) | Hik white<br>Stainless Steel<br>126X105X250mm<br>2280g<br>Match up with wall mount(DS-1473ZJ-135) | Hik white<br>Aluminum alloy<br>with junction box<br>136×243×290mm<br>1490g          |

| Product form                                                                        | Model                                          | Relevant brackets and housings                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| PT 5                                                                                | DS-2CD2F22FWD-I(W)(S)<br>DS-2CD2F42FWD-I(W)(S) | Indoor                                                                               |                                                                                       |
|                                                                                     |                                                |  |  |
|  |                                                | DS-1294ZJ                                                                            | DS-1280ZJ-PT3                                                                         |
|                                                                                     |                                                | Wall mount                                                                           | Junction box                                                                          |
|                                                                                     |                                                | Hik white<br>Toughened Plastic<br>223.9×80×125.8mm<br>450g                           | Hik white<br>Plastic<br>Ø120×40mm<br>104g                                             |

| Product form                                                                      |                                                                                   | Model          | Relevant brackets and housings                                                    |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Dual-lens                                                                         |  | iDS-2CD6810F/C | indoor                                                                            |                                                                                     |                                                                                     |
|                                                                                   |                                                                                   |                |  |  |  |
|  |                                                                                   |                | DS-1227ZJ-P1                                                                      | DS-2102ZJ                                                                           | DS-1299ZJ                                                                           |
|                                                                                   |                                                                                   |                | In-ceiling mount                                                                  | Wall mount                                                                          | Pendant Mount                                                                       |
|                                                                                   |                                                                                   |                | Hik white<br>Ø253.4×8.5mm                                                         | Hik white<br>194×110×50mm                                                           | Hik white<br>Aluminum Alloy<br>77×77×198mm<br>165g                                  |

| Product form                                                                      |                                                                                   | Model           | Relevant brackets and housings                                                    |                                                                                    |                                                                                     |                                                                                                                                   |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Dome 30                                                                           |  | DS-2CD6986F-(H) | Outdoor                                                                           |                                                                                    |                                                                                     |                                                                                                                                   |
|                                                                                   |                                                                                   |                 |  |  |  |                                                |
|  |                                                                                   |                 | DS-1271ZJ-DM30-E                                                                  | DS-1605ZJ-DM30                                                                     | DS-1280ZJ-BQ30                                                                      | DS-1275ZJ-SUS                                                                                                                     |
|                                                                                   |                                                                                   |                 | Pendant mount                                                                     | Wall mount                                                                         | Junction Box                                                                        | Vertical pole mount                                                                                                               |
|                                                                                   |                                                                                   |                 | Hik white<br>Aluminum alloy<br>Ø205.6×359mm<br>1920g                              | Hik white<br>Aluminum alloy<br>205.6×183.5×333.6mm<br>1620g                        | Hik white<br>Aluminum alloy<br>Ø195×38.5mm                                          | Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Ø67-127mm<br>1205g<br>Match up with wall mount(DS-1605ZJ-DM30) |

| Product form                                                                        |                                                                                     | Model               | Relevant brackets and housings                                                      |                                                                                       |                                                                                            |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| PanoVu                                                                              |  | DS-2CD6A64F-IHS/NFC | Outdoor                                                                             |                                                                                       |                                                                                            |                                                                                       |
|                                                                                     |                                                                                     |                     |  |  |       |  |
|  |                                                                                     |                     | DS-1602ZJ-P                                                                         | DS-1663ZJ-P                                                                           | DS-1673ZJ-P                                                                                | DS-1602ZJ-pole-P                                                                      |
|                                                                                     |                                                                                     |                     | Wall mount                                                                          | Pendant mount                                                                         | Horizontal pole mount                                                                      | Vertical pole mount                                                                   |
|                                                                                     |                                                                                     |                     | Grey<br>Aluminum alloy<br>97×182×305mm                                              | Grey<br>Aluminum alloy<br>Ø116.5×57mm                                                 | Grey<br>Steel<br>Diameter of the clamp Ø67-127mm<br>Match up with DS-1661ZJ-P, DS-1663ZJ-P | Grey<br>Aluminum alloy<br>117×194×310mm                                               |

# BRACKET

PTZ AND ZOOM CAMERA

| Product form                                                                      | Model          | Relevant brackets and housings                                                    |                                                                                    |                                                                                              |                                                                                                                                                                  |                                                                                                                            |
|-----------------------------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
|  | DS-2DE3204W-DE | Indoor                                                                            |                                                                                    |                                                                                              |                                                                                                                                                                  |                                                                                                                            |
|                                                                                   |                |  |  |           |                                                                               |                                         |
|                                                                                   |                | DS-1227ZJ-PT6<br>In-ceiling mount<br><br>Hik white<br>Steel+Platic<br>Φ210×79.3mm | DS-1273ZJ-PT6<br>Wall mount<br><br>Hik white<br>183.5×140×232mm                    | DS-1280ZJ-PT6<br>Junction Box<br><br>Hik white<br>Aluminum alloy<br>136.5×42×162.5mm<br>280g | DS-1275ZJ-SUS<br>Vertical pole mount<br><br>Hik white<br>Stainless Steel<br>127×46×250mm<br>Diameter of clamp: Φ67-127mm<br>1205g<br>Match up with DS_1273ZJ-PT6 | DS-1276ZJ-SUS<br>Corner mount<br><br>Hik white<br>Stainless Steel<br>126×105×250mm<br>2280g<br>Match up with DS_1273ZJ-PT6 |

| Product form                                                                                    | Model                                                                                    | Relevant brackets and housings                                                                          |                                                                                                                              |                                                                                                                     |                                                                                                |                                                                                              |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
|               | DS-2DE4220IW-DE                                                                          | Outdoor                                                                                                 |                                                                                                                              |                                                                                                                     |                                                                                                |                                                                                              |
|                                                                                                 |                                                                                          |                        |                                             |                                  |             |           |
|                                                                                                 |                                                                                          | DS-1661ZJ<br>Pendant mount<br><br>Hik white<br>Aluminum alloy<br>Φ116.5×200mm<br>600g                   | DS-1662ZJ<br>Pendant mount<br><br>Hik white<br>Aluminum alloy<br>Φ116.5×500mm<br>960g                                        | DS-1663ZJ<br>Ceiling mount<br><br>Hik white<br>Aluminum alloy<br>Φ116.5×57mm<br>380g                                | DS-1618ZJ<br>Wall mount(short arm)<br><br>Hik white<br>Aluminum alloy<br>110×145×189mm<br>550g | DS-1660ZJ<br>Parapet wall mount<br><br>Hik white<br>Aluminum alloy<br>180×950×800mm<br>2900g |
|              |       |                      |                                         |                                |           |         |
| DS-1604ZJ-pole<br>Vertical pole mount<br><br>Hik white<br>Aluminum alloy<br>170.7×261.8×355.5mm | DS-1604ZJ-corner<br>Corner mount<br><br>Hik white<br>Aluminum alloy<br>206.8×261.8×465mm | DS-1604ZJ-box<br>Wall mount with junction box<br><br>Hik white<br>Aluminum alloy<br>281.2×170.7×395.5mm | DS-1604ZJ-BOX-POLE<br>Vertical Pole Mount<br>with junction box<br><br>Hik white<br>Aluminum alloy & steel<br>222×139.3×422mm | DS-1604ZJ-BOX-CORNER<br>Wall Mount with junction box<br><br>Hik white<br>Aluminum alloy & stee<br>255.5×314×542.5mm | DS-1619ZJ<br>Gooseneck mount<br><br>Hik white<br>Aluminum alloy<br>455.2×130.4×841.5mm         | DS-1671ZJ-SDM9<br>In-ceiling mount<br><br>Hik Black<br>Steel + plastic<br>Φ232.9×142.6mm     |

| Product form                                                                      |                  | Model                                                                             |                                                                                    | Relevant brackets and housings                                                      |                                                                                     |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| PT11                                                                              | DS-2DE4A220IW-DE | Outdoor(only available for outdoor PTZ model)                                     |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|                                                                                   |                  |  |  |  |  |  |  |
|                                                                                   |                  | DS-1605ZJ<br>Wall Mount Bracket                                                   | DS-1671ZJ-SD11<br>In-ceiling Mount Bracket                                         | DS-1280ZJ-SD11<br>Junction Box                                                      | DS-1691ZJ-L<br>Pendant mount                                                        | DS-1691ZJ-M<br>Pendant mount                                                        | DS-1691ZJ<br>Pendant mount                                                          |
|  |                  | Hik white<br>Aluminum alloy<br>183.5×120×228.6mm<br>1120g                         | Hik white<br>Aluminum alloy<br>Ø233×85mm                                           | Hik white<br>Aluminum alloy<br>Ø158×40mm                                            | Hik white<br>Steel<br>124×84×1000mm<br>2175g                                        | Hik white<br>Steel<br>124×84×500mm<br>1175g                                         | Hik white<br>Aluminum alloy<br>84×124×335mm<br>980g                                 |

| Product form                                                                        | Model                                                                               | Product form                                                                        | Model                                                                               | Product form                                                                        | Model                                                                                | Product form                                                                          | Model                                                                                 | Product form                                                                          | Model                                                                                 |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 5 inch with IR                                                                      | DS-2DE5XXXI<br>DS-2AE5XXXTI<br>DS-2AE5XXXTI-A(B)                                    | 5 inch without IR                                                                   | DS-2AE5XXX<br>DS-2DE5XXX                                                            | IR PTZ Dome<br>Camera4                                                              | DS-2AE7XXX<br>DS-2DE7XXX                                                             | 6 inch                                                                                | DS-2DF6XXX                                                                            | 8 inch                                                                                | DS-2DF8XXXI<br>DS-2DF82XXIW-AEL<br>DS-2DF8836I5V-AEL<br>DS-2DF82XXI-AEL(B)            |                                                                                       |                                                                                       |
|    |                                                                                     |    |                                                                                     |  |                                                                                      |   |                                                                                       |    |                                                                                       |                                                                                       |                                                                                       |
| Relevant brackets and housings                                                      |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
| Outdoor(only available for outdoor PTZ model)                                       |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|  |  |  |  |  |  |  |  |  |  |  |  |
| DS-1661ZJ                                                                           | DS-1662ZJ                                                                           | DS-1663ZJ                                                                           | DS-1660ZJ                                                                           | DS-1604ZJ                                                                           | DS-1604ZJ-pole                                                                       | DS-1604ZJ-corner                                                                      | DS-1604ZJ-box                                                                         | DS-1604ZJ-BOX-Pole                                                                    | DS-1604ZJ-BOX-CORNER                                                                  | DS-1619ZJ                                                                             | DS-1667ZJ                                                                             |
| Pendant mount                                                                       | Pendant mount                                                                       | Ceiling mount                                                                       | Parapet wall mount                                                                  | Wall mount                                                                          | Vertical pole mount                                                                  | Corner mount                                                                          | Wall mount with junction box                                                          | Vertical Pole Mount with junction box                                                 | Wall Mount with junction box                                                          | Gooseneck mount                                                                       | Extendable pole for Pendant mount                                                     |
| Hik white<br>Aluminum alloy<br>Φ116.5×200mm<br>600g                                 | Hik white<br>Aluminum alloy<br>Φ116.5×500mm<br>960g                                 | Hik white<br>Aluminum alloy<br>Φ116.5×57mm<br>380g                                  | Hik white<br>Aluminum alloy<br>180×950×800mm<br>2900g                               | Hik white<br>Aluminum alloy<br>255×171×355.5mm<br>2150g                             | Hik white<br>Aluminum alloy<br>170.7×261.8<br>×355.5mm                               | Hik white<br>Aluminum alloy<br>206.8×261.8<br>×465mm                                  | Hik white<br>Aluminum alloy<br>281.2×170.7<br>×395.5mm                                | Hik white<br>Aluminum alloy & steel<br>222×139.3×422mm                                | Hik white<br>Aluminum alloy & steel<br>255.5×314<br>×542.5mm                          | Hik white<br>Aluminum alloy<br>455.2×130<br>.4×841.5mm                                | Hik white<br>Galvanized steel pipe<br>1500-2500mm                                     |

| Product form                                                                      | Model                                          | Relevant brackets and housings                                                    |                                                                                                 |                                                                                     |                                                                                     |                                                                                                                            |                                                                                                                         |                                                                                     |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| PanoVu                                                                            | DS-2DP0818Z-D<br>DS-2DP1636Z-D<br>DS-2DP1636-D | Outdoor                                                                           |                                                                                                 |                                                                                     |                                                                                     |                                                                                                                            |                                                                                                                         |                                                                                     |                                                                                     |
|                                                                                   |                                                |  |                |  |  |                                         |                                      |  |  |
|  |                                                | DS-1603ZJ                                                                         | DS-2663ZJ                                                                                       | DS-1668ZJ                                                                           | DS-1668ZJ(20)                                                                       | DS-1673ZJ                                                                                                                  | DS-1684ZJ                                                                                                               | DS-1678ZJ                                                                           | DS-1619ZJ-P                                                                         |
|                                                                                   |                                                | Wall mount                                                                        | 3-axis Mount                                                                                    | Pendant mount                                                                       | Pendant mount                                                                       | Horizontal pole mount                                                                                                      | Vertical Pole mount                                                                                                     | Junction Box                                                                        | Gooseneck mount                                                                     |
|                                                                                   |                                                | Hik white<br>Aluminum alloy<br>98×182×362mm                                       | Hik white<br>Aluminum alloy<br>275.8×269×140.1mm<br>2600g<br><b>Note: Only for DS-2DP1636-D</b> | Hik white<br>Steel<br>Φ115×58mm<br>620g                                             | Hik white<br>Steel<br>Φ115×200mm<br>1150g                                           | Hik white<br>Steel(mounting board) & Stainless Steel(clamp)<br>Diameter of clamp: Φ67-127mm<br>Match up with pendant mount | Hik white<br>Steel(mounting board) & Stainless Steel(clamp)<br>Diameter of clamp: Φ67-127mm<br>Match up with Wall mount | Hik white<br>Aluminum alloy<br>286×424×119.5mm                                      | Hik white<br>Steel<br>455×130×815.5mm                                               |

| Product form                                                                      | Model                                                           | Relevant brackets and housings                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------------------------|
| PanoVu PT                                                                         | IDS-2PT9122IX-D/S<br>Wall mount bracket included in the package | Outdoor                                                                           |
|                                                                                   |                                                                 |  |
|  |                                                                 | DS-2664ZJ                                                                         |
|                                                                                   |                                                                 | Pendant mount                                                                     |
|                                                                                   |                                                                 | Grey<br>Aluminum alloy<br>Φ203.5×217.4mm                                          |



# 2018 Q1 EU CCTV CATALOGUE

## Solution Series

### Hikvision Headquarters

No.555 Qianmo Road  
310052 Hangzhou  
China  
T +86 571 88075998  
sales@hikvision.com

### Hikvision Europe

Dirk Storklaan 3  
2132 PX Hoofddorp  
The Netherlands  
T +31 23 5542770  
info.eu@hikvision.com

### Hikvision France

6 rue Paul Cézanne,  
93360 Neuilly-Plaisance  
France  
T +33 (0)1 85330450  
info.fr@hikvision.com

### Hikvision Italy

Via Abruzzo 12  
Z.I. San Giacomo  
31029 Vittorio Veneto TV  
Italy  
T +39 0438 6902  
info.it@hikvision.com

### Hikvision Poland

The Park, Office Building A  
Krakowiaków 50  
02-255 Warsaw, Poland  
T +48 22 4600150  
info.pl@hikvision.com

### Hikvision Spain

Calle de Almazara 9  
28760 Tres Cantos  
Madrid, Spain  
T +34 91 7371655  
info.es@hikvision.com

### Hikvision Czech

BETA Building, Vyskocilova  
1481/4, Prague 4  
Czech Republic  
T +42 29 6182640  
info.cz@hikvision.com

### Hikvision Germany

Flughafenstr. 21  
63263 Neu-Isenburg  
Zeppelinheim, Germany  
T +49 69 401507290  
sales.dach@hikvision.com